

Date: _____

Type: _____

Project: _____

ALDO BOLLARD

Discover our cutting-edge, sleek design crafted from aluminum. Choose from a variety of finishes and explore the double head assembly option. For custom dimensions, reach out to Solera today!

Construction: Experience the elegance of our 34-inch standard bollard, meticulously crafted from durable aluminum. Its sleek design ensures both resilience and captivating visual appeal.

Mounting: The fixture housing attaches securely to the anchoring plate using two flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: standard clear lens

Lamp: high power LEDs with 50,000 hrs. rated lamp life
L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: accent light

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD, 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, vinyl graphic prints (contact factory), ground fault receptacle, button photocell (voltage specific)


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped

Listing: complies with CSA & UL dark-sky standards; label for outdoor location



Warranty: 5-year limited warranty



ALDO-BLD:

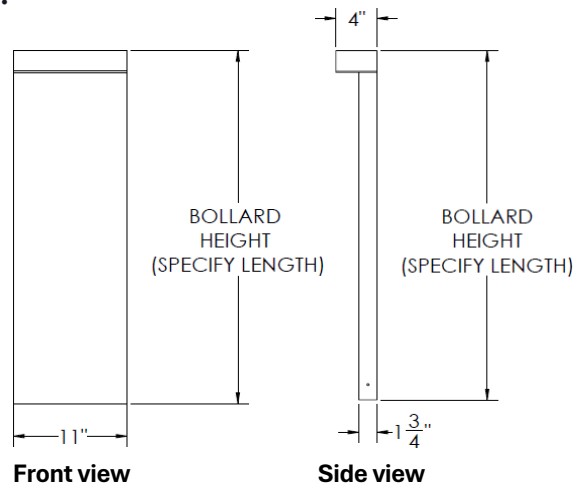

Anchoring Details:

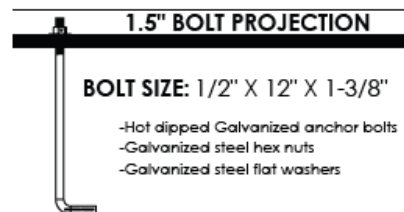

--	--	--	--	--	--	--	--	--	--

Name	Size	Light Engine (per side)	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
ALDO-BLD	34"	40W	UNV	3000K	ABT	CL	AL	TP	BL
2ALDO-BLD			347V	3500K				TS	BZ
			480V	4000K				GFR	WH
				5000K				PC	SG
									CC
	custom wattage and size available								H-DIP

Notes:

- 3000K – 141 lm/w
- 3500K – 144 lm/w
- 4000K – 147 lm/w
- 5000K – 149 lm/w
- 2ALDO-BLD – Double head assembly (contact Solera)
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchors, bolts, & template
- CL – Clear lens (std)
- AL – Accent light
- TP – Tamperproof hardware
- TS – Tamperproof bits
- GFR – Ground fault receptacle
- PC – Button photocell (voltage specific)
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact Factory for pattern design option)