

Date: _____

Type: _____

Project: _____

APOLLO SERIES POST TOP

APOLLO SERIES is a lantern series with contemporary look that comes in various hood and louver designs. Ideal for pedestrian walkways and can be pier mounted, pole mounted or wall mounted. Its lens is silicone sealed for full weather protection. All external hardware is stainless-steel.

Construction: Fixture housing is constructed from fabricated aluminum for durability with weatherproof silicone gasket seal for all weather protection. External hardware is stainless-steel for corrosion resistance.

Mounting: pier mount, pole mount, wall mount

Lens: opal acrylic

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type V


Driver: 60Hz, 120-277V / 347V/480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, button photocell, 0-10v 10% dimming

Finish: black, white, silver grey, bronze, custom color available upon request

Listing: complies with CSA & UL standards; label for outdoor location

Warranty: 5-year limited warranty

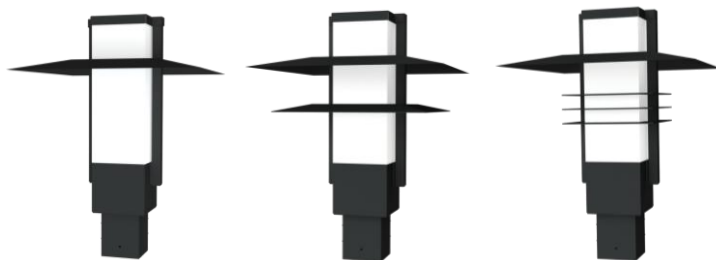


APOLLO I


APOLLO II

APOLLO III


APOLLO :



TOP VIEW




FRONT VIEW




SIDE VIEW


APOLLO I, II & III :



FRONT VIEW



FRONT VIEW



FRONT VIEW



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--

Name	Light Engine (maximum)	Color Temperature	Electrical	Mounting	Lens	Light Pattern	Options	Finish
APOLLO I		3000K	UNV	PIER	OAL	TY5	TP	BL
APOLLO II	48W	3500K	347V	PT			TS	BZ
APOLLO III		4000K	480V	WM			PC	WH
		5000K					DM	SG
custom wattage available								CC

Notes:

- 3000K – 156 lm/w
- 3500K – 159 lm/w
- 4000K – 164 lm/w
- 5000K – 166 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- PIER – Pier mount, contact factory
- PT – Post top / pole mount (must confirm size of pole/tenon prior to order)
- WM – Wall mount, contact factory
- OAL – Opal acrylic lens (std)
- TY5 – Type V light distribution (std)
- TP – Tamperproof hardware
- TS – Tamperproof bits
- PC – voltage specific button photocell
- DM – 0-10v 10% dimming
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- CC – Custom color (confirm RAL No. prior to production)