

Date: _____

Type: _____

Project: _____

BONGO POST TOP

Introducing our powerful post top design for dark-sky initiatives. BONGO has a modern appearance with light distributed by symmetric indirect throw. All external hardware is stainless-steel. We can customize for lower wattages. Asymmetric light distribution is also available. Check under Post Top / Pole Mount.

Construction: Fixture housing is constructed from fabricated aluminum for durability with weatherproof silicone gasket sealing for all weather protection. External hardware is stainless-steel for corrosion resistance.

Mounting: slips over 3" or 4" pole

Lens: clear

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Symmetric

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: step dimming, motion sensor, tamperproof hardware, tamperproof bits, button photocell


Finish: black, white, silver grey, bronze, custom color available upon request

Listing: complies with CSA & UL standards; label for outdoor location

Warranty: 5-year limited warranty



BONGO:

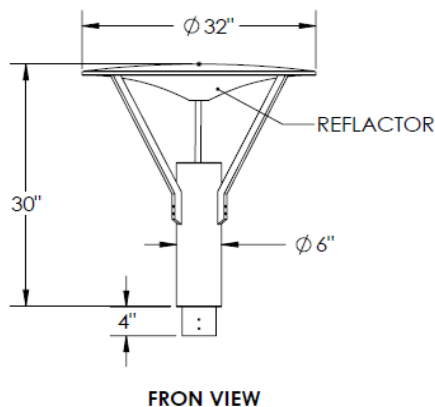

Note:

Available in Wall Mount version and Pole Mount (Contact factory).



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--

Name	Light Engine (maximum)	Color Temperature	Electrical	Mounting	Lens	Light Pattern	Options	Finish
BONGO	60W	3000K	UNV	PT3	CPL	SYM	SD	BL
		3500K	347V	PT4			MS	BZ
		4000K	480V	PT5			TP	WH
		5000K					TS	SG
custom wattage available							PC	CC

Notes:

- 3000K – 141 lm/w
- 3500K – 144 lm/w
- 4000K – 147 lm/w
- 5000K – 149 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- PT3 – Post top slips over 3" pole
- PT4 – Post top slips over 4" pole
- CPL – Clear lens (std)
- SYM – Symmetric light distribution
- MS/SD – Motion sensor with Step dimming
- TP – Tamperproof hardware
- TS – Tamperproof bits
- PC – voltage specific button photocell
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- CC – Custom color (Confirm RAL No. prior to production)