

Date: _____

Type: _____

Project: _____

CIRRO BOLLARD

Elevate your outdoor space with our stylish 8-inch round bollard. Its captivating color-changing LED capability adds a modern and playful touch, making it truly unique.

Construction: Crafted from durable aluminum, our standard bollard stands at 38 inches, ensuring both resilience and visual appeal.

Mounting: The fixture housing is securely mounted to the ground using three flush-mounted anchor bolts, and anchor plate. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: Comes with our standard opal lens – an elegant choice for all your optical needs.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type V

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, ground fault receptacle, button photocell (voltage specific), house cut-off, programmable color-changing LED, emergency driver, emergency driver cold pack.


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped finish

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty



CIRRO-BLD:


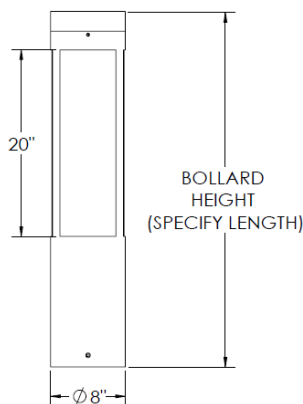


Front view



Top view

Anchoring details:

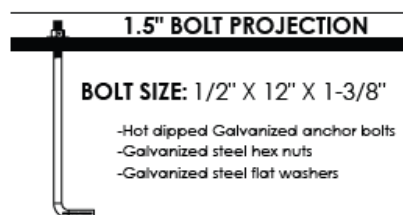

--	--	--	--	--	--	--	--	--	--

Name	Height	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
CIRRO-BLD	38"	40W	UNV	3000K	ABT	OAL	TY5	TP	BL
			347V	3500K				TS	BZ
			480V	4000K				GFR	WH
				5000K				PC	SG
				RGBW				HCO	CC
								RGBW	H-DIP
	custom wattage and size available							EM	

Notes:

- 3000K – 156 lm/w*
- 3500K – 159 lm/w*
- 4000K – 164 lm/w*
- 5000K – 166 lm/w*
- UNV – Universal voltage (120-277V)
- 347V –347 volts
- 480V –480 volts
- ABT – Anchor, bolts, & template
- OAL – Opal lens
- TY5 – Type V distribution
- TP – Tamperproof hardware
- TS – Tamperproof bits
- GFR – Ground fault receptacle
- PC – Button photocell (voltage specific)
- HCO – House side shield
- RGBW – Programmable color-changing LEDs
- EM – Emergency driver
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact Factory for pattern design options)

*Does not apply to RGBW