

Date: _____

Type: _____

Project: _____

DEL-II WALL MOUNT

Introducing our angled wall mount luminaire. DEL-II is created to illuminate interior spaces with accent lighting. The luminaire housing consists of a stepped extruded aluminum frame with rectangular back and top plates. The plates ensure a 90-degree bi-directional forward and downward lighting pattern.

Construction: Fixture is fabricated from durable aluminum with weather-proof silicon gasket seal and stainless-steel external hardware for all-weather protection and corrosion resistance.

Mounting: Fixture is suitable to mount over a standard J-box.

Lens: Provide distinct lighting with our standard opal lens.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Up and down light is our standard offering. There is option for more concentrated illumination going exclusively downward or forward.

Driver: 60Hz, 120-277V / 347V/480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: 0-10v 10% dimming, 0-10v 1% dimming, emergency driver, programmable color changing LEDs


Finish: black, white, silver grey, bronze, custom color available upon request

Listing: complies with CSA & UL standards; label for indoor location


Warranty: 5-year limited warranty




DEL-II:



TOP VIEW

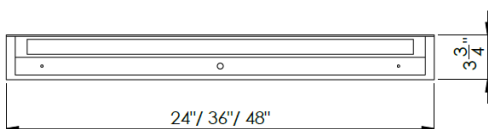

FRONT VIEW



SIDE VIEW

--	--	--	--	--	--	--	--	--	--

Name	Size	Lamping	Electrical	Color Temperature	Mounting	Lena	Light Pattern	Options	Finish
DEL-II	24"	20W LED	UNV	3000K	COVE	OAL	DF	DM	BL
	36"	36W LED	347V	3500K			D	DM1	BZ
	48"	48W LED	480V	4000K			F	EM	WH
				5000K				RGBW	SG
									CC
custom wattage available									

Notes:

- 3000K – 156 lm/w*
- 3500K – 159 lm/w*
- 4000K – 164 lm/w*
- 5000K – 166 lm/w*
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- COVE – Cove mount
- OAL – Opal acrylic lens (std)
- DF – down and front light (std)
- D – Down light only
- F – Front light
- DM – 0-10v 10% dimming
- DM1 – 0-10v 1% dimming
- EM – Emergency driver
- RGBW – Programmable color changing LEDs
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- CC – Custom color (Confirm RAL No. prior to production)

*Does not apply to RGBW