

Date: _____

Type: _____

Project: _____

DGR BOLLARD

Elevate your outdoor space with our sleek, modern DGR bollard. Its elegant black frame and versatile lighting make it perfect for gardens, pathways, or driveways, adding a touch of sophistication and charm to your area.

Construction: Fixture housing is constructed from aluminum for durability. Weather-proof silicone gasket seal for all weather protection. Stainless steel external hardware for corrosion resistance.

Mounting: The fixture housing attaches securely to the anchoring plate using four flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: Standard opal lens emit a comforting glow.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type V


Driver: 60Hz, 120-277V / 347V/ 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, button photocell (voltage specific), motion sensor, ground fault receptable, step dimming, emergency driver



Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped finish

Listing: complies with CSA & UL standards; label for outdoor location



Warranty: 5-year limited warranty

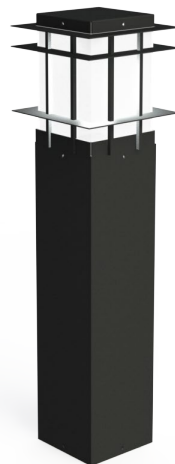

DGR-B:

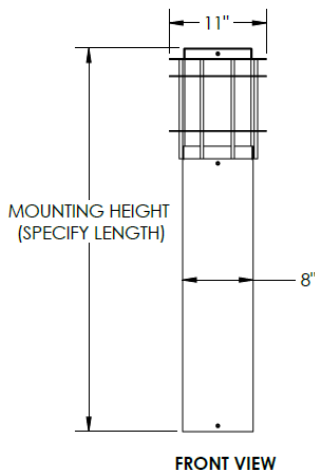

Anchoring Details:





CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Size	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
DGR-B	42"	48W	UNV	3000K	ABT	OAL	TY5	TP	BL
			347V	3500K				TS	BZ
			480V	4000K				PC	WH
				5000K				MS/SD	SG
								GFR	CC
								EM	H-DIP
	custom wattage and size available								

Notes:

- 3000K – 156 lm/w
- 3500K – 159 lm/w
- 4000K – 164 lm/w
- 5000K – 166 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchors, bolts, & template
- OAL – Opal lens
- TY5 – Type V light distribution
- TP – Tamperproof hardware
- TS – Tamperproof bits
- PC – Button photocell (voltage specific)
- MS – Motion sensor with step dimming
- GFR – Ground fault receptable
- EM – Emergency driver
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)