

Date: _____

Type: _____

Project: _____

DIX-PM POLE MOUNT

Enhance your outdoor space with our stylish DIX Fixtures! Crafted from durable aluminum material, this luminaire offers both aesthetic appeal and resilience against the elements. Perfect for lighting walkways or adding ambiance to your garden. It's an essential addition to any exterior design.

Construction: Constructed from durable aluminum extrusion and available in various finishes, this fixture is built to last. The silicone-sealed gasketing ensures superior weather protection, while the sleek monotone color adds a touch of modern elegance to any space.

Mounting: ER3 Mounting

Lens: clear lens

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type V, Type IV, Type III, Type II

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: step dimming, motion sensor, button photocell, 0-10V 10% dimming, trespass cut-off


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped finish

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty




DIX-PM:




SIDE VIEW



FRONT VIEW

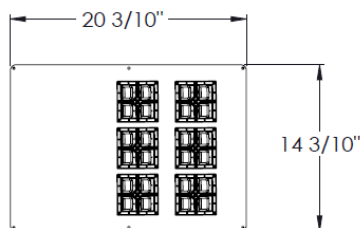

BOTTOM VIEW



POLE DRILLING PATTERN

**CUSTOM ARCHITECTURAL LIGHTING**

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--

Name	Light Engine (maximum)	Color Temperature	Electrical	Mounting	Lens	Light Pattern	Options	Finish
DIX-PM	288W LED	3000K	UNV	CR3	CPL	TY5	SD	BL
		3500K	347V			TY4	MS	BZ
		4000K	480V			TY3	PC	WH
		5000K				TY2	DM	SG
							TCO	CC
custom wattage available								

Notes:

- 3000K – 152 lm/w
- 3500K – 157 lm/w
- 4000K – 160 lm/w
- 5000K – 160 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- PT3 – Post top slips over 3" pole
- PT4 – Post top slips over 4" pole
- CPL – Clear lens (std)
- TY5 – Type V light distribution (std)
- TY4 – Type IV light distribution
- TY3 – Type III light distribution
- TY2 – Type II light distribution
- MS/SD – Motion sensor with Step dimming
- PC – voltage specific button photocell
- DM – 0-10V 10% dimming
- TCO – Trespass cut-off
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- CC – Custom color (Confirm RAL No. prior to production)