

Date: _____

Type: _____

Project: _____

ERB BOLLARD

Introducing the bollard version of our ERB Post-Top. Crafted from durable aluminum extrusion, its trimmed design features an optical assembly with a high-impact opal diffuser, elegantly enclosed by three vertical bars. When illuminated, it emits a gentle, inviting glow. It stands at a standard height of 42 inches, making it an ideal choice for enhancing outdoor spaces. Whether you're securing pathways or adding aesthetic appeal, our ERB bollard delivers both style and functionality!

Construction: This 42-inch standard height bollard is carefully crafted from durable aluminum extrusion, combining resilience with an eye-catching design.

Mounting: The fixture attaches securely to the ground and anchoring plate using three flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: Comes with opal lens which softens the light emitted making it an excellent choice for minimizing visual discomfort while providing illumination.

Lamp: high power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type V distribution (std)

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD, 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, 0-10V dimming, ground fault receptacle, button photocell (voltage specific), emergency driver, emergency driver cold pack.


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped

Listing: complies with CSA & UL standards; label for outdoor location



Warranty: 5-year limited warranty



ERB-BLD:

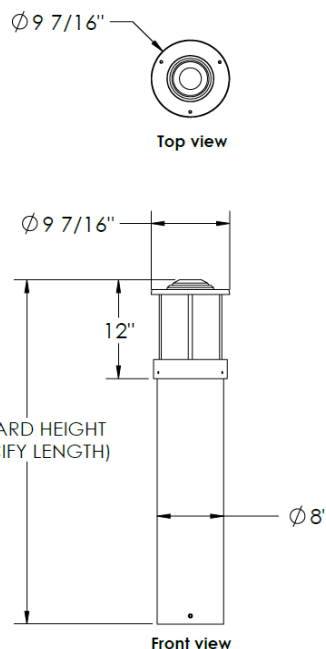

Anchoring Details:

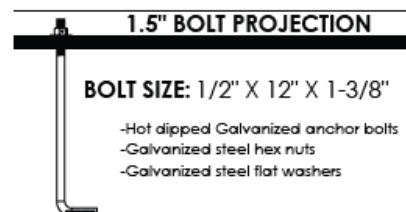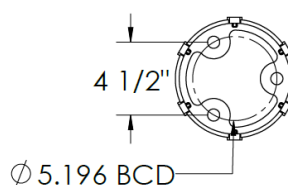

--	--	--	--	--	--	--	--	--	--

Name	Height	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
ERB-BLD	42"	48W	UNV	3000K	ABT	OAL	TY5	TP	BL
			347V	3500K				TS	BZ
			480V	4000K				DM	WH
				5000K				GFR	SG
								PC	CC
		custom wattage and size available						EM	H-DIP
								EM-CLD	

Notes:

- 3000K – 141 lm/w
- 3500K – 144 lm/w
- 4000K – 147 lm/w
- 5000K – 149 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchor, bolts, & template
- OAL – Opal lens (std)
- TY5 – Type V distribution
- TP – Tamperproof hardware
- TS – Tamperproof bits
- DM – 0-10V 10% dimming
- GFR – Ground fault receptacle
- PC – Button photocell (voltage specific)
- EM – Emergency driver
- EM-CLD – Cold pack emergency driver
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact Factory for pattern design option)