

Date: _____

Type: _____

Project: _____

EXIT SIGN BOLLARD

Experience unparalleled functionality and versatility with our premium EXIT SIGN. Customize it to your exact needs with options for bollard height, back cover, directional arrows, down light, lens color, sign cut-outs, engraving, and color finish. Upgrade your safety signage today and ensure it stands out while providing clear, reliable guidance.

Construction: Constructed from durable aluminum extrusion and available in various finishes, this bollard is built to last. The silicone-sealed gasketing ensures superior weather protection, while the sleek monotone color adds a touch of modern elegance to any space.

Mounting: The fixture housing attaches securely to the anchoring plate using four flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: Elevate your safety signage with our vibrant EXIT SIGN BOLLARDS! Choose from our standard Green EXIT SIGN or make a bold statement with our Red or Blue options. Enhance visibility with our clear lens designed for downlight applications. Ensure your exits are clearly marked and stylishly presented.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: No downlight (Std), Type IV downlight distribution, Type V downlight distribution.

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, 0-10V dimming, 2-sided EXIT SIGN, right directional arrow, left directional arrow, back cover, engraving at bottom panel, emergency driver

Finish: black, white, silver grey, bronze, custom color available upon request; hydro-dipped

Listing: complies with CSA & UL standards; Label for outdoor location

Warranty: 5-year limited warranty



Green exit with arrow




Green exit with arrow & downlight





Green exit with arrow, downlight, & back cover

EXIT SIGN-BLD:

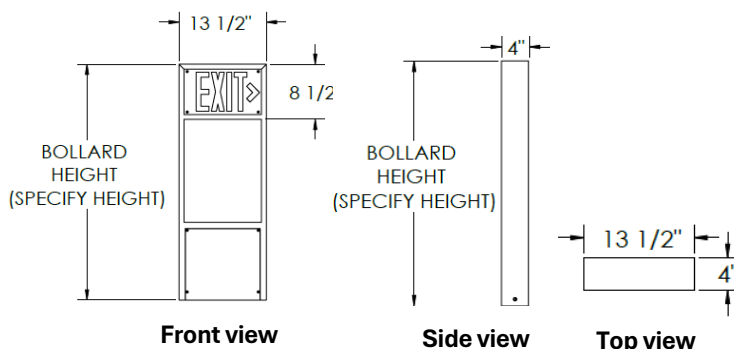

Anchoring Details:

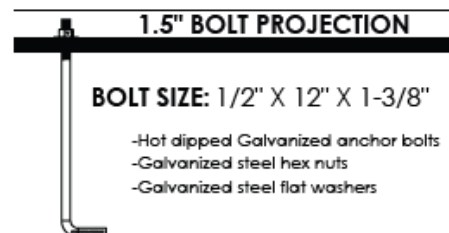

--	--	--	--	--	--	--	--	--	--

Name	Size	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
EXIT SIGN BLD	36"	12W	UNV	3000K	ABT	GE	ND	TP	BL
			347V	3500K		RE	TY4-D	TS	BZ
			480V	4000K		BE	TY5-D	DM	WH
				5000K				2SE	SG
						CL (for downlight only)		DA-R	CC
								DA-L	H-DIP
								BC	
								ENG	
custom wattage and size available								EM	

Notes:

- 3000K – 152 lm/W
- 3500K – 157 lm/W
- 4000K – 160 lm/W
- 5000K – 160 lm/W
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchors, bolts, & template
- GE – Green EXIT SIGN (std)
- RE – Red EXIT SIGN
- BE – Blue EXIT SIGN
- CL – Clear lens (for downlight only)
- ND – No downlight (std)
- TY4-D – Type IV downlight distribution
- TY5-D – Type V downlight distribution
- TP – Tamperproof hardware
- TS – Tamperproof bits
- DM – 0-10V 10% dimming
- 2SE- 2-sided EXIT SIGN
- DA-R – Right directional arrow
- DA-L – Left directional arrow
- BC – Back cover
- ENG – Engraving at bottom panel
- EM – Emergency driver
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)