

Date: _____

Type: _____

Project: _____

GAR-B BOLLARD

Elevate your space with this contemporary bollard. Designed not only for robust security but also to enhance aesthetic appeal. Its elegant curved top add a touch of sophistication, making it an ideal choice for those looking to combine functionality with style. Durable and easy to install, this bollard is perfect for delineating spaces while complementing any modern architectural design.

Construction: Discover the perfect blend of durability and elegance with our extruded aluminum bollard. Its silicone-sealed lens gasket ensure superior protection and longevity. Ideal for modern spaces, this bollard not only enhances security but also adds a sleek, sophisticated touch to any environment.

Mounting: The fixture housing attaches securely to the anchoring plate using four flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: Choose standard clear lens for optimal visibility or Lexan lens for enhanced vandal resistance, ensuring clarity and durability.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Forward throw

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, button photocell (voltage specific), motion sensor, step dimming, ground fault receptacle, base cover, emergency driver.


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped finish

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty



GAR-B:

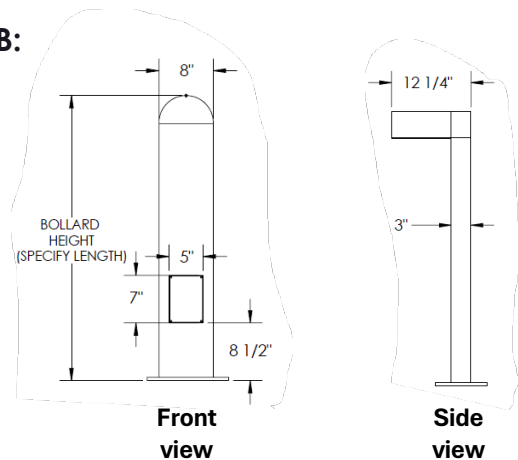

Anchoring Details:

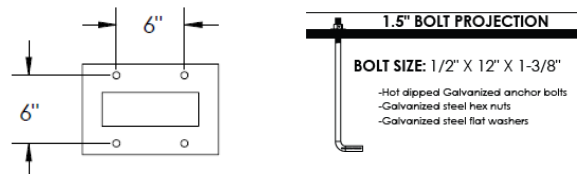

--	--	--	--	--	--	--	--	--	--

Name	Size	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
GAR-B	42"	42W	UNV	3000K	ABT	CL	FT	TP	BL
			347V	3500K		LE		TS	BZ
			480V	4000K				PC	WH
				5000K				MS/SD	SG
								BC	CC
								GFR	H-DIP
	custom wattage and size available			EM					

Notes:

- 3000K – 152 lm/w
- 3500K – 157 lm/w
- 4000K – 160 lm/w
- 5000K – 160 lm/w
- UNV – Universal voltage (120V - 277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchors, bolts, & template
- CL – Clear lens (std)
- LE – Lexan lens (vandal resistant)
- FT – Forward throw
- TP – Tamperproof hardware
- TS – Tamperproof bits
- PC – Button photocell (voltage specific)
- MS – Motion sensor with step dimming
- BC – Base cover
- GFR – Ground fault receptacle
- EM- Emergency driver
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)