

Date: _____

Type: _____

Project: _____

GM BOLLARD

Enhance your entrance with the versatile GM BOLLARD! Customizable for intercoms, card readers, and handicap buttons, it offers seamless integration. Solera provides the cutouts; you specify the details. Perfect for any entryway!

Construction: Built to last, our fixture features a durable aluminum housing, a weatherproof silicone gasket for all-weather protection, and corrosion-resistant stainless-steel hardware. Perfect for various environments!

Mounting: The fixture housing attaches securely to the anchoring plate using three flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: Experience clear lighting with our standard clear lens.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Downlight

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: motion sensor, step dimming, intercom (cut out only), handicap push button (cut out only), card reader (cut out only), emergency driver


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped finish

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty



GM BOLLARD:

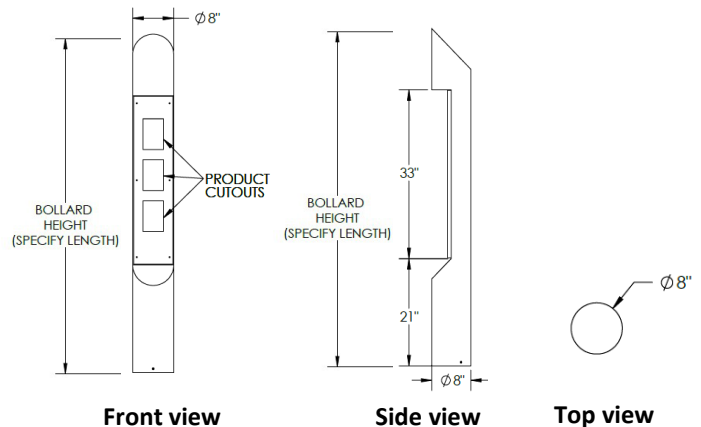

Anchoring Details:

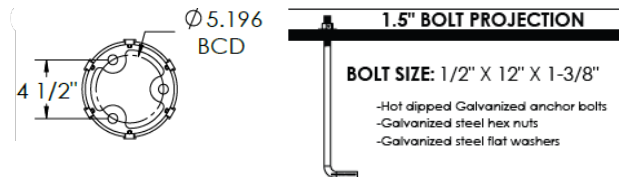



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Size	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
GM BOLLARD	66"	20W	UNV	3000K	ABT	CL	D	MS/SD	BL
			347V	3500K				EM	BZ
			480V	4000K				COM	WH
				5000K				HBP	SG
								CR	CC
	custom wattage and size available								H-DIP

Notes:

- 3000K – 141 lm/w
- 3500K – 144 lm/w
- 4000K – 147 lm/w
- 5000K – 149 lm/w
- UNV – Universal voltage (120V - 277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchors, bolts, & template
- CL – Clear lens
- D – Downlight
- MS – Motion sensor with Step dimming
- COM – Intercom (cut out only)*
- HPB – Handicap push button (cut out only)*
- CR – Card reader (cut out only)*
- EM – Emergency driver
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)

*Require product mounting dimensions prior to production.