

Date: _____

Type: _____

Project: _____

ING GROUND RECESSED

This is our round in-ground recessed luminaire. We offer in stainless steel trim, frosted lens, and Protection Class IP67.

Construction: Fixture is a multi-piece arrangement where the housing is made of fabricated aluminum for durability with weatherproof silicon gasket seal for all weather protection. Its top piece consists of stainless-steel trim. Its recessed box is polypropylene. External hardware is stainless-steel for corrosion resistance.

Mounting: in-ground recessed

Lens: frosted, prismatic, clear

Light distribution: narrow beam, medium beam, wide beam

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, wire guard, glare shield


Finish: black, white, silver grey, bronze, custom color available upon request

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty



ING-625:

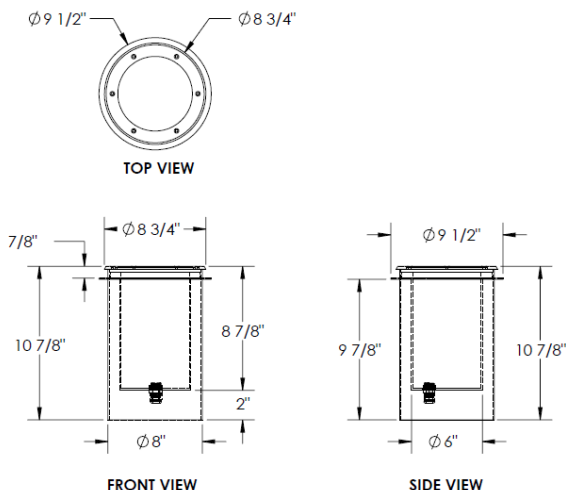

ING-626:

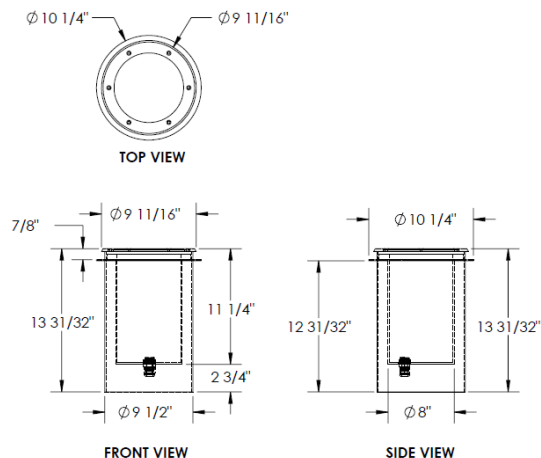

--	--	--	--	--	--	--	--	--

Name	Light Engine (maximum)	Color Temperature	Electrical	Mounting	Lens	Light Pattern	Options	Finish
ING-625	24W	3000K	UNV	IR	FG	NB	TP	SS
ING-626	40W	3500K	347V		PG	MB	TS	BL
		4000K	480V		CG	WB	WG	BZ
		5000K					GS	WH
								SG
custom wattage available								CC

Notes:

- 3000K – 141 lm/w
- 3500K – 144 lm/w
- 4000K – 147 lm/w
- 5000K – 149 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- IG – In-ground recessed
- CG – Clear polycarbonate lens (std)
- FG – Frosted glass lens (std)
- PG – Prismatic glass lens
- CG – Clear glass lens
- NB – Narrow beam light distribution
- MB – Medium beam light distribution
- WB – Wide beam light distribution
- TP – Tamperproof hardware
- TS – Tamperproof bits
- WG – Wire guard
- GS – Glare shield
- SS – Stainless-steel trim (std)
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- CC – Custom color (Confirm RAL No. prior to production)