

Date: _____

Type: _____

Project: _____

LEX WALL MOUNT

Our sleek surface luminaire is designed to give functional lighting to interior spaces. Ideal for hotel, dorm, or hospital bed lighting, the housing consists of an extruded aluminum frame with a silicone sealed flat lens that gives direct and indirect illumination. This simple wall design gives the perfect lighting for your space.

Construction: Fixture is made from aluminum extrusion with weather-proof silicon gasket seal and stainless-steel external hardware for all-weather protection and corrosion resistance.

Mounting: Fixture is suitable to mount over a standard J-box.

Lens: Satinice lens is our standard offering. Also available in frosted lens.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: up light and down light

Driver: 60Hz, 120-277V / 347V/480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: 0-10v 10% dimming, 0-10v 1% dimming emergency driver, remote driver, tamperproof hardware, tamperproof bits, motion sensor, step dimming



Finish: black, white, silver grey, bronze, custom color available upon request

Listing: complies with CSA & UL standards; label for indoor location

Warranty: 5-year limited warranty




LEX:

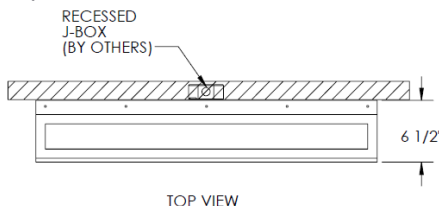

PRODUCT	DIM-A	DIM-B
LEX-24	24"	21"
LEX-36	36"	33"
LEX-48	48"	45"
LEX-60	60"	57"

MOUNTING DETAILS:





CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Size	Lamping (maximum per side)	Electrical	Color Temperature	Mounting	Lens	Light Pattern	Options	Finish
LEX-24	24"	24W LED	UNV	3000K	WM	SL	UD	DM	BL
LEX-36	36"	36W LED	347V	3500K		FL	D	DM1	BZ
LEX-48	48"	48W LED	480V	4000K			U	EM	WH
LEX-60	60"	60W LED		5000K				RB	SG
								TP	BA4
								TS	CC
custom wattage and size available								MS/SD	

Notes:

- 3000K – 156 lm/w
- 3500K – 159 lm/w
- 4000K – 164 lm/w
- 5000K – 166 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- WM – Wall mount
- SL – Satinice lens (std)
- FL – Frosted lens
- UD – Up and down light (std)
- D – Down light only
- U – Up light only
- DM – 0-10v 10% dimming
- DM1 – 0-10v 1% dimming
- EM – Emergency driver
- RB – Remote driver
- TP – Tamperproof hardware
- TS – Tamperproof bits
- MS/SD – Motion sensor with Step dimming
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- BA4 – Brushed aluminum #4
- CC – Custom color (Confirm RAL No. prior to production)