

Date: _____

Type: _____

Project: _____

LLA WALL RECESSED

LLA is a recessed wall luminaire designed for step light applications. It is made of fabricated aluminum with a tempered glass lens which is silicone sealed for bug and weather protection. All external hardware is stainless-steel.

Construction: Fixture housing is constructed from fabricated aluminum for durability with weatherproof silicon gasket seal for all weather protection. External hardware is stainless-steel for corrosion resistance.

Mounting: Fixture is suitable for recessed mounting in drywall or concrete or as standard wall mount

Lens: linear prismatic

Light distribution: forward throw

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD, 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: louvered front face, tamperproof hardware, tamperproof bits, emergency battery


Finish: black, white, silver grey, bronze, custom color available upon request

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty




LLA:

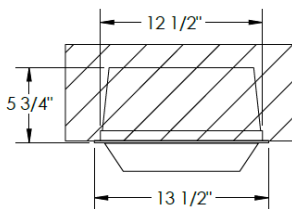

TOP VIEW



FRONT VIEW

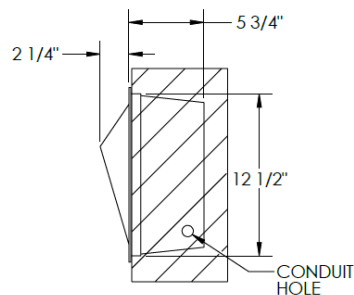

SIDE VIEW



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--

Name	Light Engine (maximum)	Color Temperature	Electrical	Mounting	Lens	Light Pattern	Options	Finish
LLA	48W	3000K	UNV	R	LPL	FT	TP	BL
		3500K	347V	RTC	LOF		TS	BZ
		4000K	480V	WM			EM	WH
custom wattage available		5000K						SG
								CC

Notes:

- 3000K – 191 lm/w
- 3500K – 198 lm/w
- 4000K – 204 lm/w
- 5000K – 204 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- R – Recessed in dry wall
- RTC – Recessed in concrete
- WM – Wall mount
- LPL – Linear prismatic lens
- LOF – Louvered front face
- FT – Forward throw
- TP – Tamperproof hardware
- TS – Tamperproof bits
- EM – Emergency driver
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- CC – Custom color (Confirm RAL No. prior to production)