

Date: \_\_\_\_\_

Type: \_\_\_\_\_

Project: \_\_\_\_\_

## MOD WALL RECESSED

MOD is a recessed wall luminaire designed for step light applications. The housing and door frame are constructed of cast aluminum with a frosted tempered glass lens which is silicone sealed for bug and weather protection. All external hardware is stainless-steel.

**Construction:** Fixture housing is made of cast aluminum for durability with weatherproof silicon gasket seal for all weather protection. External hardware is stainless-steel for corrosion resistance.

**Mounting:** Fixture is suitable for recessed mounting in drywall or concrete.

**Lens:** frosted lens

**Light distribution:** forward throw

**Lamp:** High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

**Driver:** 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

**Options:** tamperproof hardware, tamperproof bits, wet location


**Finish:** black, white, silver grey, bronze, custom color available upon request

**Listing:** complies with CSA & UL standards; label for outdoor location

**Warranty:** 5-year limited warranty



### MOD:

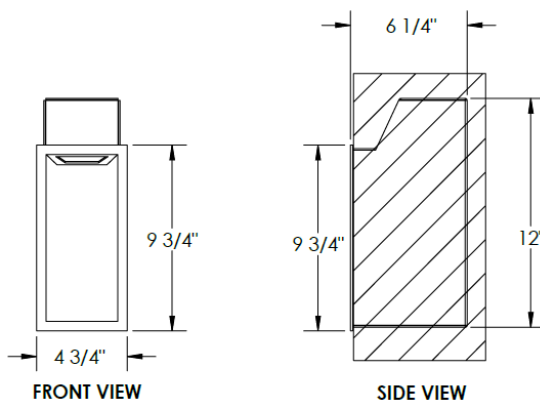



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

[soleracorp.com](http://soleracorp.com)

|  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|

| Name                     | Light Engine<br>(maximum) | Color<br>Temperature | Electrical | Mounting | Lens | Light<br>Pattern | Options | Finish |
|--------------------------|---------------------------|----------------------|------------|----------|------|------------------|---------|--------|
| MOD                      | 11W                       | 3000K                | UNV        | R        | FG   | FT               | TP      | BL     |
|                          |                           | 3500K                | 347V       | RTC      |      |                  | TS      | BZ     |
|                          |                           | 4000K                | 480V       |          |      |                  | WL      | WH     |
| custom wattage available |                           | 5000K                |            |          |      |                  |         | SG     |
|                          |                           |                      |            |          |      |                  |         | CC     |

## Notes:

- 3000K – 141 lm/w
- 3500K – 144 lm/w
- 4000K – 147 lm/w
- 5000K – 149 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- R – Recessed in dry wall
- RTC – Recessed in concrete
- FG – Frosted lens
- FT – Forward throw
- TP – Tamperproof hardware
- TS – Tamperproof bits
- WL – Wet location
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- CC – Custom color (Confirm RAL No. prior to production)