



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

Date: _____

Type: _____

Project: _____

NEMO LIGHT COLUMN

Introducing our sleek square lighting column. NEMO has a modern & simplistic appeal with a unique slanting design on the shaft. Its over-all profile comprises of a smooth body with straight, sharp corners. Uplift your landscape with this eye-catching NEMO LIGHT COLUMN!

Construction: Fixture housing constructed from 6061 aluminum alloy. Weatherproof silicon gasket seal for all weather protection. Stainless steel external hardware for corrosion resistance.

Mounting: The fixture attaches securely to the ground and anchoring plate using four flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: Opal lens

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type V


Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature ranging between -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, 0-10V 10% dimming, ground fault receptacle, programmable color changing LEDs, custom height (contact Factory)


Finish: black, white, silver gray, bronze, custom color available upon request, hydro-dipped finish

Listing: complies with CSA & UL standards; approved for outdoor location


Warranty: 5-year limited warranty

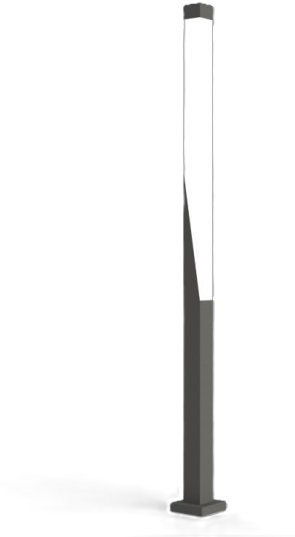

NEMO:

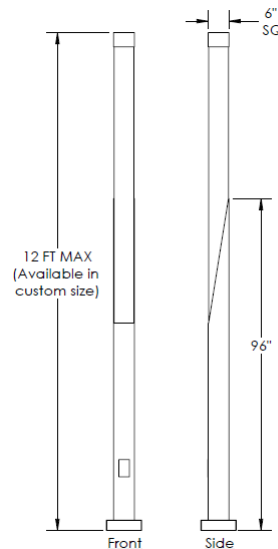

Anchoring details:



Anchorbolt Size: 3/4" X 18" X 3-3/4"

-Hot dipped Galvanized anchor bolts
-Galvanized steel hex nuts
-Galvanized steel flat washers



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Height (inches)	Light Engine (maximum)	Color Temp	Electrical	Mounting	Lens	Light Pattern	Options	Finish
NEMO	144	38W	3000K	UNV	ABT	OPL	TY5	TP	BL
			3500K	347V				TS	BZ
			4000K	480V				DM	WH
			5000K					GFR	SG
								RGBW	CC
									H-DIP
custom wattage and size available									

Notes:

- 3000K – 156 Source lm/w*
- 3500K – 159 Source lm/w*
- 4000K – 164 Source lm/w*
- 5000K – 166 Source lm/w*
- UNV – Universal voltage (120-277V)
- 347V – 347 Volt
- 480V – 480 Volt
- ABT – Anchors, bolts, template
- OPL – Opal lens
- TY5 – Type V light distribution
- TP – Tamperproof hardware
- TS – Tamperproof bits
- DM – 0-10V dimming
- GFR – Ground fault receptacle
- RGBW – Programmable color changing LEDs
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)

*Does not apply to RGBW