



CUSTOM ARCHITECTURAL LIGHTING

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Toll free: 1 877 765 3722

Fax: 905 457 1115

soleracorp.com

Date: _____

Type: _____

Project: _____

OSLO BOLLARD

Introducing our modern round bollard! This bollard is designed to enhance outdoor spaces while being dark sky compliant to ensure minimal light pollution. The flat top and illuminated section feature a unique middle cone and fin partitions elegantly distributing light in four distinct sectors. Customize your bollard by choosing different color finishes for the top and shaft while our classic black adorns the cone and fins. With a standard size of 8" outer diameter and a height of 39", this bollard is both functional and stylish.

Construction: Experience the elegance of our 39-inch standard bollard. Crafted from durable 6061-T6 aluminum, its simple design ensures both resilience and captivating visual appeal.

Mounting: The fixture housing is mounted securely to the ground with an anchoring plate using three flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: standard clear lens

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: all 4 sides; 2 quadrants, same side; 2 quadrants, opposite sides; 3 quadrants; 1 quadrant

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, 0-10V dimming, ground fault receptacle, button photocell (voltage specific), emergency driver, emergency driver cold pack


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped

Listing: complies with CSA & UL dark-sky standards; label for outdoor location


Warranty: 5-year limited warranty



OSLO-BLD:

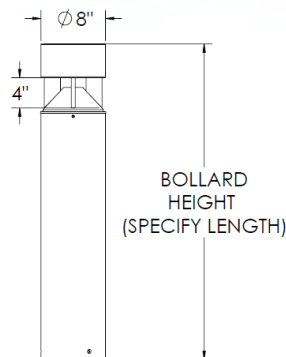


Front view




Top view


Anchoring Details:



Front

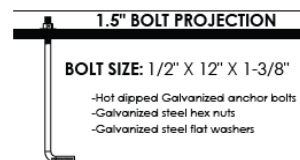

Light Distribution:

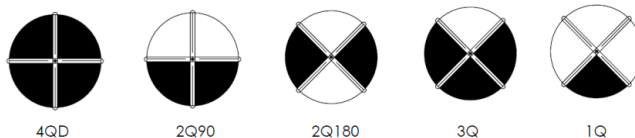



CUSTOM ARCHITECTURAL LIGHTING

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Toll free: 1 877 765 3722

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Size	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish			
OSLO-8	39"	40W	UNV	3000K	ABT	CPL	4QD	TP	BL			
		20W	347V	3500K			2Q90	TS	BZ			
			480V	4000K			2Q180	DM	WH			
				5000K			3Q	PC	SG			
							1Q	GFR	CC			
	custom wattage and size available							EM	H-DIP			
									EM-CLD			

Notes:

- 3000K – 152 lm/w
- 3500K – 157 lm/w
- 4000K – 160 lm/w
- 5000K – 160 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchor, bolts, & template
- CPL – Clear polycarbonate lens
- 4QD – All 4 sides
- 2Q90 – 2 quadrants, same side
- 2Q180 – 2 quadrants, opposite sides
- 3Q – 3 quadrants
- 1Q – 1 quadrant
- TP – Tamperproof hardware
- TS – Tamperproof bits
- DM – 0-10V 10% dimming
- PC – Button photocell (voltage specific)
- GFR – Ground fault receptacle
- EM – Emergency driver
- EM-CLD – Emergency driver cold pack
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)