



CUSTOM ARCHITECTURAL LIGHTING •

120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Toll free: 1 877 765 3722

Fax: 905 457 1115

soleracorp.com

Date: _____

Type: _____

Project: _____

PAC BOLLARD

Introducing our sleek 28-inch bollard. Its elegant design incorporates an inconspicuous down light perfect for illuminating pathways and enhancing outdoor spaces.

Construction: Experience the simplistic beauty of our 28-inch standard bollard, meticulously crafted from durable 6061-T6 aluminum extrusion. Its simple modern design ensures both resilience and captivating visual appeal.

Mounting: The fixture attaches securely to the ground and anchoring plate using four flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: standard clear lenses

Lamp: high power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: accent light

Driver: 60Hz, 120-277V / 347V/ 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, 0-10V dimming, base cover, two different color finishes for top & shaft


Finish: black, white, silver grey, bronze (custom color available upon request), hydro dipped

Listing: complies with CSA & UL standards; label for outdoor location



Warranty: 5-year limited warranty



PAC-BLD:

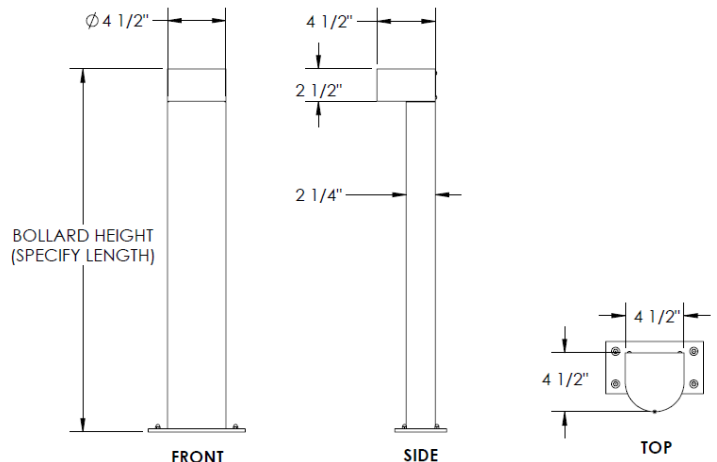

Anchoring Details:

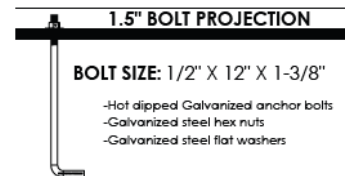



CUSTOM ARCHITECTURAL LIGHTING

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Toll free: 1 877 765 3722

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Height	Light Engine	Electrical	Color Temperature	Mounting	Lens	Light Pattern	Options	Finish
PAC-BLD	28"	10W	UNV	3000K	ABT	CL	AL	TP	BL
			347V	3500K				TS	BZ
			480V	4000K				DM	WH
				5000K				BC	SG
	custom wattage and height available							2T	CC
									H-DIP

Notes:

- 3000K – 141 lm/w
- 3500K – 144 lm/w
- 4000K – 147 lm/w
- 5000K – 149 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchor, bolts, & template
- CL – Clear lens (std)
- AL – Accent light (std)
- TP – Tamperproof hardware
- TS – Tamperproof bits
- DM – 0-10V 10% dimming
- BC – Base cover
- 2T – Two different color finishes for top & shaft (select two finishes)
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)