

Date: _____

Type: _____

Project: _____

PHARE BOLLARD

Transform your pathways with PHARE! Designed to elevate any space, PHARE offers a range of optical systems tailored to meet your specific needs. Illuminate your surroundings with style and sophistication.

Construction: Experience unmatched durability with our fixture housing, crafted from premium aluminum. Designed to withstand any weather, it features weatherproof silicone gasket seal for ultimate protection. Plus, with stainless-steel external hardware, you get superior corrosion resistance. Invest in quality that lasts!

Mounting: The fixture housing attaches securely to the anchoring plate using three flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: Experience diffused glow with our standard opal lens.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: 6 windows - type V distribution, 3 windows - type III distribution

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C

Options: tamperproof hardware, tamperproof bits, button photocell (voltage specific), motion sensor, ground fault receptacle, step dimming, programmable color changing LEDs, emergency driver


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty



PHARE:

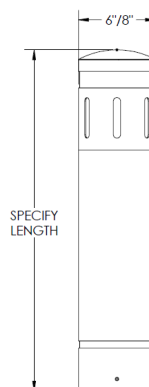


Front view




Top view


Anchoring Details:



PHARE-8



PHARE-6

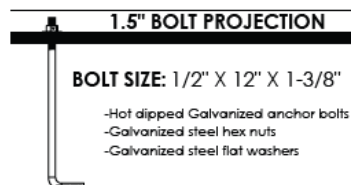



CUSTOM ARCHITECTURAL LIGHTING

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Toll free: 1 877 765 3722

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Size	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
PHARE	6"	36W	UNV	3000K	ABT	OAL	6WN	TP	BL
	8"	42W	347V	3500K			3WN	TS	BZ
			480V	4000K				PC	WH
				5000K				MS/SD	SG
								GFR	CC
									H-DIP
	custom size and wattage available								

Notes:

- 3000K – 152 lm/w
- 3500K – 157 lm/w
- 4000K – 160 lm/w
- 5000K – 160 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchors, bolts, & template
- OAL – Opal lens
- 6WN – 6 windows, Type V light distribution
- 3WN – 3 windows, Type III light distribution
- TP – Tamperproof hardware
- TS – Tamperproof bits
- PC – Button photocell (voltage specific)
- MS – Motion sensor with Step dimming
- GFR – Ground fault receptacle
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)