



CUSTOM ARCHITECTURAL LIGHTING

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Toll free: 1 877 765 3722

Fax: 905 457 1115

soleracorp.com

Date: _____

Type: _____

Project: _____

QUAD-O-B BOLLARD

Introducing our modern square bollard with a sleek, flat top. Its sharp corners create a clean and sophisticated look. This bollard emits ample, symmetrical light, perfect for walkways, pathways, and outdoor corridors. Plus, it's available as an unlit bollard, and you can customize the lens color and finishes to match your style.

Construction: Our standard 5-inch base bollard offering features durable aluminum extrusion, with the added option for stainless steel construction.

Mounting: The fixture housing attaches securely to the anchoring plate using four flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: Discover the soft glow of our standard opal lens.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type V distribution

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C

Options: tamperproof hardware, tamperproof bits, programmable color changing LED, 0-10V dimming, button photocell (voltage specific), ground fault receptacle, stainless-steel construction


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped

Listing: complies with CSA & UL standards; label for outdoor location



Warranty: 5-year limited warranty



QUAD-O-B:

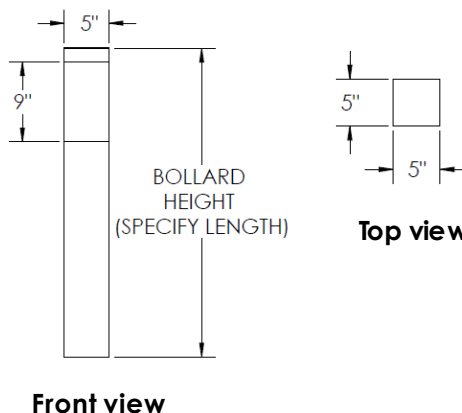

Anchoring Details:

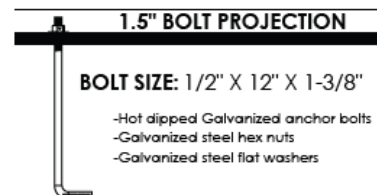



CUSTOM ARCHITECTURAL LIGHTING •

120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Toll free: 1 877 765 3722

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Size	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
QUAD-O-B	13"	10W	UNV	3000K	ABT	OAL	TY5	TP	BL
	36"	24W	347V	3500K				TS	BZ
			480V	4000K				RGBW	WH
				5000K				DM	SG
								PC	CC
								GFR	H-DIP
								SS	
	custom wattage and size available								

Notes:

- 3000K – 156 lm/w*
- 3500K – 159 lm/w*
- 4000K – 164 lm/w*
- 5000K – 166 lm/w*
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchors, bolts, & template
- OAL – Opal lens (std)
- TY5 – Type V light distribution
- TP – Tamperproof hardware
- TS – Tamperproof bits
- RGBW – Programmable color changing LED
- DM – 0-10V 10% dimming
- PC – Button photocell (voltage specific)
- GFR – Ground fault receptacle
- UNSS – Stainless-steel construction
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)

*Does not apply to RGBW

►►► Info on this spec sheet will change without notice as product development is an ongoing process.