



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

Date: _____

Type: _____

Project: _____

ROCK BOLLARD

Presenting the Rock Bollard, with a flat top and uniquely curved sides. During the day, it seamlessly blends into your outdoor landscape. By night, its specialized optics cast a warm downward glow, illuminating walkways with subtle elegance. Whether enhancing a garden or defining pathways, this bollard is the perfect choice. Contact Solera for the column version.

Construction: Crafted from aluminum extrusion, our versatile bollard stands at a standard height of 42 inches. There is flexibility to customize its height to perfectly suit your outdoor space! Whether lining pathways or accentuating garden features, this bollard is your canvas. Contact us today to elevate your landscape with personalized elegance.

Mounting: The fixture attaches securely to the ground and anchoring plate using three flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: The standard frosted lens gently diffuses light, creating a soft and inviting ambiance.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: accent light (std)

Driver: 60Hz, 120-277V / 347V/ 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, 0-10 dimming, button photocell, ground fault receptacle


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped

Listing: complies with CSA & UL standards; label for indoor and outdoor location


Warranty: 5-year limited warranty



ROCK-BLD:

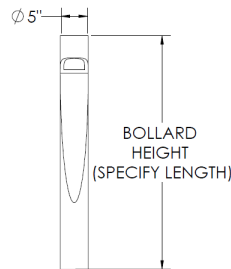


Front view

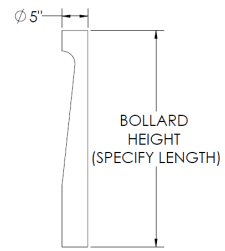

Side view

Anchoring Details:

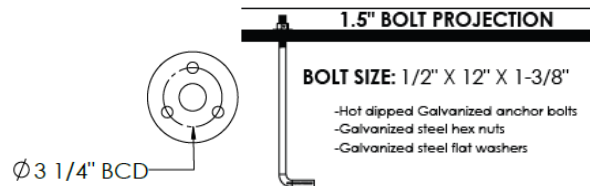

Note:

Available in column version
(check under outdoor luminaires: ROCK COLUMN)



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Size	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
ROCK-BLD	42"	30W	UNV	3000K	ABT	FL	AL	TP	BL
			347V	3500K				TS	BZ
			480V	4000K				DM	WH
				5000K				PC	SG
	Custom wattage and size available							GFR	CC
									H-DIP

Notes:

- 3000K – 141 lm/w
- 3500K – 144 lm/w
- 4000K – 147 lm/w
- 5000K – 149 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchors, bolts, & template
- FL – Frosted lens
- AL – Accent light (std)
- TP – Tamperproof hardware
- TS – Tamperproof bits
- DM – 0-10V dimming
- PC – Button photocell, voltage specific
- GFR – Ground fault receptacle
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)