

Date: _____

Type: _____

Project: _____

RUS POLE MOUNT

A conical luminaire that features an aluminum shade with a distinct bottom portion cleanly lined with flat lens giving direct downward illumination. Don't forget to explore the pendant version under Interior Luminaires.

Construction: Carefully crafted using aluminum alloy finished seamlessly showing smooth surface to guarantee long-lasting performance. It's stainless-steel external hardware and all-weather silicon gasket seal ensures corrosion resistance and durability.

Mounting: decorative, curved, custom arm for 4" pole

Lens: Flat clear lens, Flat opal lens, sagging lens

Lamping: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type V, Type III, Type II

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: banner arms, custom pole configuration, 0-10v 10% dimming, button photocell, step dimming


Finish: black, white, silver grey, bronze, custom color available upon request

Listing: complies with CSA & UL standards; label for indoor location

Warranty: 5-year limited warranty




RUS:



TYPE	A	B	C	D
RUS-S	18"	13"	25"	25"
RUS-L	24"	17"	30"	30"

MOUNTING OPTIONS:

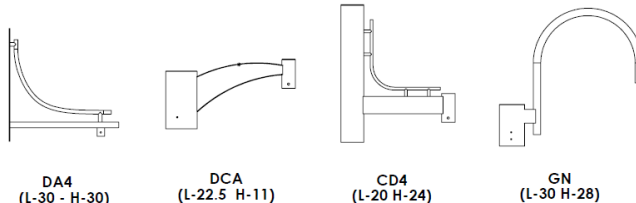

Note:

Available in pendant version.
Check under indoor luminaires.

--	--	--	--	--	--	--	--	--

Name	Light Engine (maximum)	Electrical	Color Temperature	Mounting		Lens	Light Pattern	Options	Finish
RUS-S	60W	UNV	3000K	DA4	DA5	CPL	TY2	DM	BL
RUS-L	144W	347V	3500K	DCA4	DCA5	OPL	TY3	PC	BZ
		480V	4000K	CD4	CD5	SAG	TY4	SD	WH
Available in custom wattage			5000K	GN4	GN5		TY5		SG
									CC

Notes:

- 3000K – 152 lm/w
- 3500K – 157 lm/w
- 4000K – 160 lm/w
- 5000K – 160 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- DA4/DA5 – Decorative arm for 4"/5" pole
- DCA4/DCA5 – Decorative curved arm for 4"/5" pole
- CD4/CD5 – Custom decorative arm for 4"/5" pole
- GN4/GN5 – Goose neck arm for 4"/5" pole
- CPL – Flat clear lens
- OPL – Flat opal lens
- SAG – Sagging lens
- TY2 – Type 2 light distribution
- TY3 – Type 3 light distribution
- TY4 – Type 4 light distribution
- TY5 – Type 5 light distribution
- DM – 0-10V 10% dimming
- PC – Voltage specific button photocell
- SD – Step dimming
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- CC – Custom color (confirm RAL No. prior to production)