

Date: _____

Type: _____

Project: _____

RWH CEILING RECESSED

Explore our expertly crafted round ceiling recessed luminaire. RWH features spun aluminum lamp housing with flat door frame, trim, and tray. Units are provided with auxiliary junction box for through wiring. All external hardware is stainless steel.

Construction: Made of spun aluminum housing

Mounting: Fixture is suitable for recessed mounting in T-bar or drywall.

Lens: clear lens, prismatic glass lens

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: down light

Driver: 60Hz, 120-277V / 347/480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, emergency driver, 0-10V 1% dimming,


Finish: black, white, silver grey, bronze, custom color available upon request

Listing: complies with CSA & UL standards; label for indoor location

Warranty: 5-year limited warranty



RWH

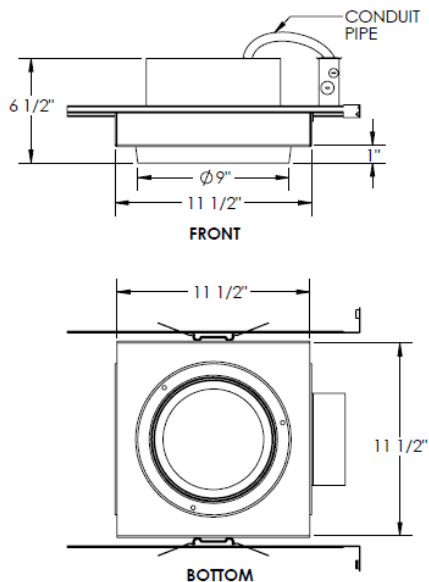



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--

Name	Light Engine (maximum)	Color Temp	Electrical	Mounting	Lens	Light Pattern	Options	Finish
RWH	60W	3000K	UNV	RT	CG	D	TP	BL
		3500K	347V	R	PG		TS	BZ
		4000K	480V				EM	WH
		5000K					DM1	SG
								CC

Notes:

- 3000K – 127 lm/w
- 3500K – 129 lm/w
- 4000K – 129 lm/w
- 5000K – 133 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 Volt
- 480V- 480 Volt
- RT – Recessed in T-bar ceiling (non-IC)
- R – Recessed in drywall
- CG – Clear lens (std)
- PG – Prismatic glass lens
- D – Down light
- TP – Tamperproof hardware
- TS – Tamperproof bits
- EM – Emergency driver
- DM1- 0-10v 1% dimming
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)