

Date: _____

Type: _____

Project: _____

SCSS WALL RECESSED

SCSS is a recessed wall luminaire designed for step light applications. The housing and door frame are constructed of cast aluminum with face plate and back box which is silicone sealed and fully gasketed for bug and weather protection. All external hardware is stainless-steel.

Construction: Fixture housing is made of cast aluminum for durability with weatherproof silicon gasket seal for all weather protection. External hardware is stainless-steel for corrosion resistance.

Mounting: Fixture is suitable for recessed mounting in drywall or concrete.

Lens: clear, opal

Light distribution: forward throw

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, emergency driver


Finish: black, white, silver grey, bronze, custom color available upon request

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty




SCSS:

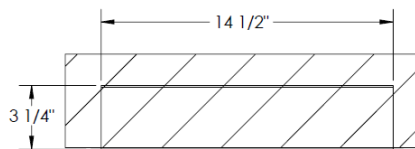

TOP VIEW

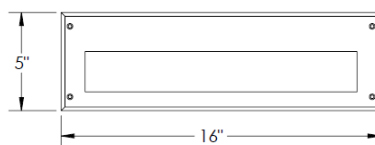

FRONT VIEW



SIDE VIEW



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--

Name	Light Engine (maximum)	Color Temperature	Electrical	Mounting	Lens	Light Pattern	Options	Finish
SCSS	24W	3000K	UNV	R	CPL	FT	TP	BL
		3500K	347V	RTC	OPL		TS	BZ
		4000K	480V				EM	WH
custom wattage available		5000K						SG
								CC

Notes:

- 3000K – 191 lm/w
- 3500K – 198 lm/w
- 4000K – 204 lm/w
- 5000K – 204 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- R – Recessed in dry wall
- RTC – Recessed in concrete
- CPL – Clear polycarbonate lens
- OPL – Opal polycarbonate lens
- FT – Forward throw
- TP – Tamperproof hardware
- TS – Tamperproof bits
- EM – Emergency battery
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- CC – Custom color (Confirm RAL No. prior to production)