

Date: _____

Type: _____

Project: _____

SL-AL BOLLARD

The SL-AL bollard is a sleek, modern lighting fixture designed for outdoor use. It features a tall, rectangular shape with an illuminated vertical strip running along its length. This bollard is ideal for enhancing pathways, landscapes, and urban environments with both functional lighting and contemporary aesthetic appeal. Its minimalist design and integrated lighting make it a versatile choice for various architectural settings.

Construction: Crafted from premium fabricated aluminum, this fixture promises both strength and style. The standard opal acrylic lens ensures a soft, inviting glow, while the silicone-sealed, fully gasketed design guarantees long-lasting performance. Plus, with all external hardware made from stainless steel, you can count on exceptional resistance to wear and tear.

Mounting: The fixture housing attaches securely to the anchoring plate using four flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: opal lens (std), frosted lens

Lamp: high power LEDs with 50,000 hrs. rated lamp life
L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: accent light


Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, stainless-steel construction, ground fault receptacle


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty

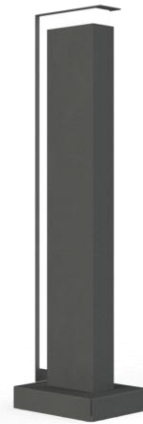

SL-AL:


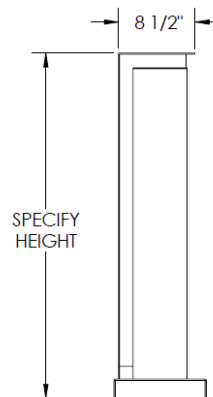


Front view

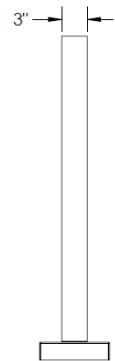

Side view

Anchoring Details:

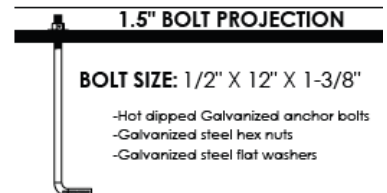



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Size	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
SL-AL	38 ½ ”	18W	UNV	3000K	ABT	OAL	AL	TP	BL
			347V	3500K	DB	FL		TS	BZ
			480V	4000K				SS	WH
				5000K				GFR	SG
									CC
custom size & wattage available									H-DIP

Notes:

- 3000K – 152 lm/w
- 3500K – 156 lm/w
- 4000K – 164 lm/w
- 5000K – 166 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchors, bolts, & template
- OAL – Opal lens (std)
- FL – Frosted lens
- AL – Accent light
- TP – Tamperproof hardware
- TS – Tamperproof bits
- SS – Stainless-steel construction
- GFR – Ground fault receptacle
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)