



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

Date: _____

Type: _____

Project: _____

SLICK BOLLARD

Introducing our Slick Square Bollard! With its flat top, sharp corners, and slim lens profile, it's the perfect addition to outdoor spaces, adding a touch of modern elegance. Plus, we offer an unlit version for even more versatility.

Construction: Enhance your outdoor spaces with style and durability. Our expertly crafted 40-inch bollard is available in a choice of 6" or 8" bases, all precisely fashioned from durable aluminum extrusion.

Mounting: The fixture attaches securely to the ground and anchoring plate using four flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: Our Slick Bollard comes with three lens choices: clear lens, opal lens, and frosted lens.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type V (std)

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, 0-10 dimming, button photocell, ground fault replaceable, emergency driver, emergency driver cold pack


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty



SLICK:


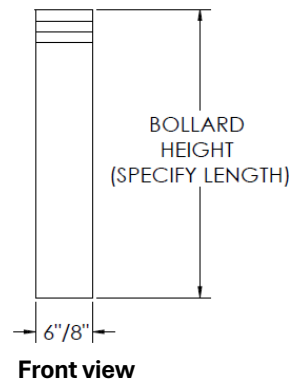


Front view



Top view

Anchoring Details:

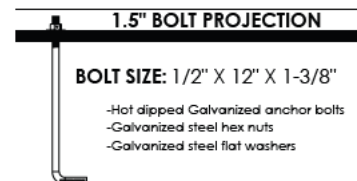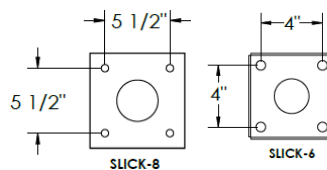



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Light Engine	Height	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
SLICK-6	14W	40"	UNV	3000K	ABT	CL	TY5	TP	BL
SLICK-8	30W	24"	347V	3500K		FL		TS	BZ
			480V	4000K		OAL		DM	WH
				5000K				PC	SG
								GFR	CC
								UN	H-DIP
								EM (for 40" height)	
	custom wattage and size available							EM-CLD (for 40" height)	

Notes:

- 3000K – 152 lm/w
- 3500K – 157 lm/w
- 4000K – 160 lm/w
- 5000K – 160 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchors, bolts, & template
- CL – Clear lens (std)
- FL – Frosted lens
- OAL – Opal lens
- TY5 – Type V distribution (std)
- TP – Tamperproof hardware
- TS – Tamperproof bits
- DM – 0-10 10% dimming
- PC – Button photocell
- GFR – Ground fault replaceable
- EM – Emergency driver (available for 40" height)
- EM-CLD – Emergency driver cold pack (available for 40" height)
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)