

Date: _____

Type: _____

Project: _____

SMSL RECESSED

SMSL is a cast aluminum compact recessed luminaire with face plate. Choose from two styles of either full face or hood face. All external hardware is stainless-steel.

Construction: Fixture housing is constructed of cast aluminum for durability with weatherproof silicon gasket seal for all weather protection. External hardware is stainless-steel for corrosion resistance.

Mounting: Fixture is suitable to mount recessed in concrete.

Lens: clear glass

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80


Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits


Finish: black, white, silver grey, bronze, custom color available upon request

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty

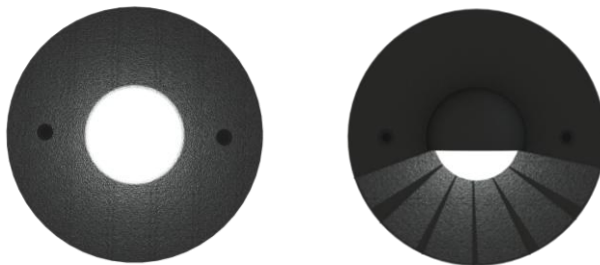

SMSL: HOOD FACE (HF) DOOR FRAME

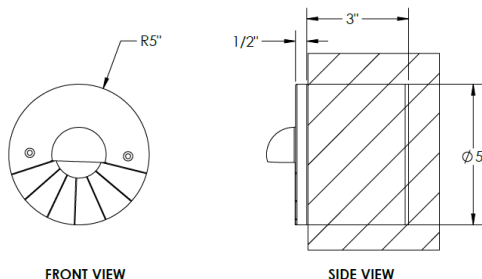

SMSL: FULL FACE (FF) DOOR FRAME

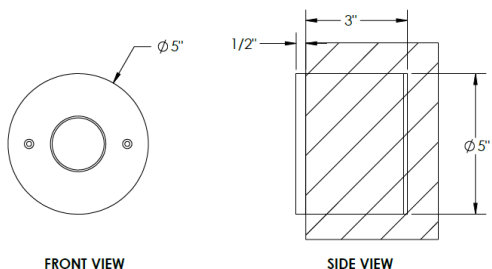



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--

Name	Light Engine (maximum)	Color Temperature	Electrical	Mounting	Lens	Options	Finish
SMSL-FF	10W	3000K	UNV	RTC	CG	TP	BL
SMSL-HF		3500K	347V			TS	BZ
		4000K	480V				WH
custom wattage available		5000K					SG
							CC

Notes:

- 3000K – 141 lm/w
- 3500K – 144 lm/w
- 4000K – 147 lm/w
- 5000K – 149 lm/w
- FF – Full face
- HF – Hood face
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- RTC – Recessed in concrete
- CG – Clear glass lens
- TP – Tamperproof hardware
- TS – Tamperproof bits
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- CC – Custom color (Confirm RAL No. prior to production)