

Date: _____

Type: _____

Project: _____

SOX BOLLARD

Introducing one of our modern column designs that features an inverted L-shaped profile, exuding simplicity and sophistication. Its clear lens enhances the direct downward illumination creating a warm and inviting ambiance. With a standard height of 40 inches, it's the perfect addition to any outdoor space. Plus, you have the option to customize with a double head assembly. Don't forget to explore our Pole Version under Exterior Light Column for even more lighting possibilities!

Construction: Discover our carefully crafted 40-inch dark-sky compliant bollard, expertly fashioned from durable aluminum. This design seamlessly blends resilience with an attention-grabbing aesthetic, making it an ideal choice for enhancing any outdoor space.

Mounting: The fixture attaches securely to the ground and anchoring plate using four flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: Experience crystal-clear vision with our standard clear lenses!

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type II (std), Type III, Type IV

Driver: 60Hz, 120-277V / 347V/ 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, ground fault receptacle, button photocell (voltage specific), emergency driver


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped

Listing: complies with CSA & UL dark-sky standards; label for outdoor location



Warranty: 5-year limited warranty



SOX-BLD:

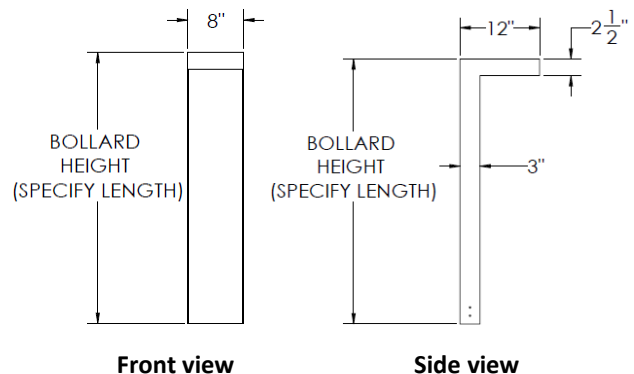

Anchoring Details:

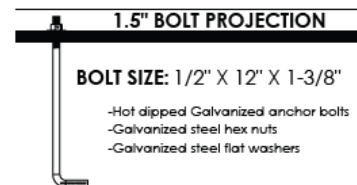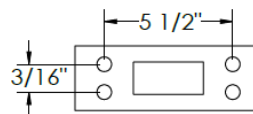

Note:

Available in double head version
Available in pole mount version (check under outdoor luminaires: SOX)



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Height	Light Engine (per head)	Electrical	Color Temperature	Mounting	Lens	Light Pattern	Options	Finish
SOX-BLD	40"	29W	UNV	3000K	ABT	CL	TY2	TP	BL
2XSOX-BLD			347V	3500K			TY3	TS	BZ
			480V	4000K			TY4	BC	WH
				5000K				GFR	SG
								PC	CC
	Custom wattage and size available							EM	H-DIP

Notes:

- 3000K – 152 lm/w
- 3500K – 157 lm/w
- 4000K – 160 lm/w
- 5000K – 160 lm/w
- 2XSOX-BLD – Twin heads, double head assembly (contact Solera)
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchor, bolts, & template
- CL – Clear lens (std)
- TY2 – Type II distribution
- TY3 – Type III distribution
- TY4 – Type IV distribution
- TP – Tamperproof hardware
- TS – Tamperproof bits
- BC – Base cover
- GFR – Ground fault receptacle
- PC – Button photocell (voltage specific)
- EM – Emergency driver
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)