

Date: _____

Type: _____

Project: _____

SRB-3-F BOLLARD

Introducing our SRB-3-F bollard. This bollard emits a symmetrical light pattern, perfect for illuminating walkways, pathways, patios, and outdoor corridors. Plus, we offer a wall mount version for added versatility.

Construction: Our 3-inch round bollard comes with a sleek, flat top design and an elegant 8½-inch opal tube lens. Choose from the standard aluminum extrusion or upgrade to the stainless-steel construction.

Mounting: The fixture housing attaches securely to the anchoring plate using three flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: The opal lens (std) provides soft, diffused illumination, creating an inviting ambiance for outdoor spaces.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type V distribution (std)

Driver: 60Hz, 120-277V / 347V/480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, 0-10V dimming, stainless-steel construction


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped

Listing: complies with CSA & UL standards; label for outdoor location



Warranty: 5-year limited warranty



SRB-3-F-BLD:

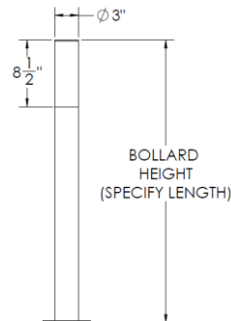

Anchoring Details:

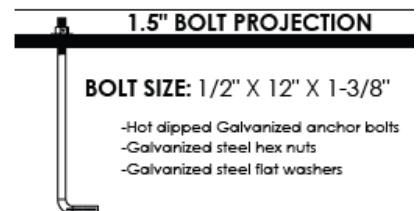

Note: Available in Wall mount.
(check under outdoor luminaires- SRB3F-WM)



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Size	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
SRB-3-F-BLD	18"		UNV	3000K	ABT	OAL	TY5	TP	BL
	24"	10W	347V	3500K				TS	BZ
	36"		480V	4000K				DM	WH
				5000K				SS	SG
									BA4
	custom wattage and size available								CC
									H-Dip

Notes:

- 3000K – 141 lm/w
- 3500K – 144 lm/w
- 4000K – 147 lm/w
- 5000K – 149 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchors, bolts, & template
- OAL – Opal lens (std)
- TY5 – Type V light distribution (std)
- TP – Tamperproof hardware
- TS – Tamperproof bits
- DM – 0-10V 10% dimming
- SS – Stainless-steel construction
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- BA4 – Brushed aluminum #4
- CC – Custom color (confirm RAL No. prior to production)
- H-Dip – Hydro-dipped finish (contact factory for pattern design options)