



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

Date: _____

Type: _____

Project: _____

SRB-HBD BOLLARD

This sleek, modern bollard is perfect for enhancing both lighting and aesthetics. Its minimalist design seamlessly blends into any landscape. Ideal for lighting up your space with style, this round bollard is a practical and attractive addition to any property.

Construction: Enhance your outdoor space with our versatile bollard, featuring a standard HBD head with external sleek cast aluminum louvers. Choose either the flat top or the dome top. We offer standard sizes in 6" or 8" diameter. Standard height is 42". For added durability, specify a concrete shaft (CONC) to complete your installation.

Mounting: The fixture housing attaches securely to the anchoring plate using three flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: clear polycarbonate lens

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type V distribution (std), 180 degrees

Driver: 60Hz, 120-277V / 347-480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: Tamperproof hardware, tamperproof bits, button photocell (voltage specific), motion sensor, step dimming, emergency driver.


Finish: black, white, silver grey, bronze, concrete shaft, custom color available upon request, hydro-dipped

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty



SRB-HBD:

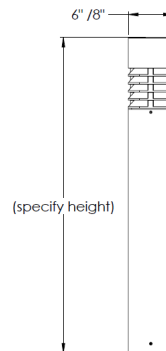


SRB6F/8F-HBD

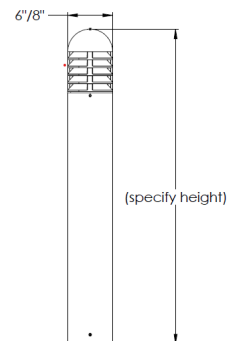


SRB6D/8D-HBD


Anchoring Details:

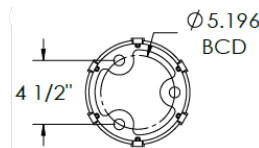

SRB 8F/8D-HBD



SRB 6F/6D-HBD

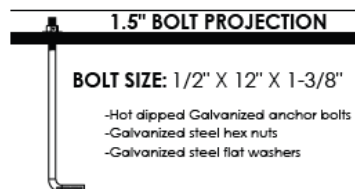



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--	--

Name	Diameter	Height	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
SRB6F-HBD	6"	42"	36W	UNV	3000K	ABT	CPL	TY5	TP	BL
SRB6D-HBD				HLV	3500K			180	TS	BZ
SRB8F-HBD	8"		48W		4000K				PC	WH
SRB8D-HBD					5000K				MS/SD	SG
									EM	CONC
									GFR	CC
										H-DIP
custom size and wattage available										

Notes:

- 3000K – 141 lm/w
- 3500K – 144 lm/w
- 4000K – 147 lm/w
- 5000K – 149lm/w
- UNV – Universal voltage (120-277V)
- HLV – High low voltage (347-480V)
- ABT – Anchors, bolts, & template
- CPL – Clear polycarbonate lens
- TY5 – Type V light distribution (std)
- 180 – 180 degrees light distribution
- TP – Tamperproof hardware
- TS – Tamperproof bits
- PC – Button photocell (voltage specific)
- MS – Motion sensor with step dimming
- GFR – Ground fault receptacle
- EM – Emergency driver
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CONC – Concrete material for shaft only
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)