



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

Date: _____

Type: _____

Project: _____

SRB BOLLARD

Elevate your landscape with round bollard, featuring a smooth, sleek finish perfect for both commercial and residential properties. The SRB series combines functionality with aesthetic appeal. Easy to install and maintain, it enhances your property's lighting and style effortlessly.

Construction: Enhance your outdoor space with our versatile aluminum bollard, featuring dome or flat head with cone reflector. We offer standard sizes in 6" or 8" diameter. The standard height is 42". For added durability, specify concrete shaft (CONC) to complete your installation.

Mounting: The fixture housing attaches securely to the anchoring plate using three flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: clean clear lens

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type II distribution, Type III distribution, Type IV distribution, Type V distribution

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: Tamperproof hardware, tamperproof bits, button photocell (voltage specific), motion sensor, step dimming, ground fault receptacle, emergency driver, internal louvers using glass lens is available for HID only


Finish: black, white, silver grey, bronze, concrete shaft, custom color available upon request, hydro-dipped

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty



SRB:

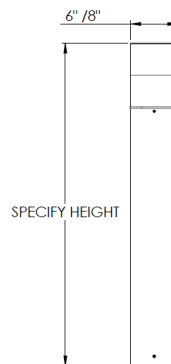


SRB6F/8F

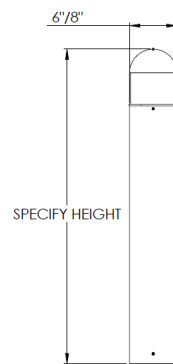


SRB6D/8D


Anchoring Details:

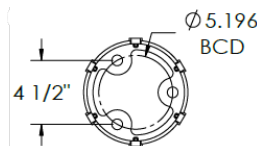

SRB 8F/8D



SRB 6F/6D

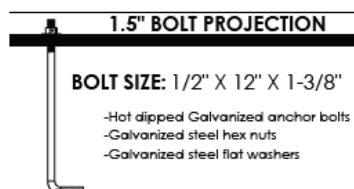



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--	--

Name	Size	Height	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
SRB6D	6"	42"	36W	UNV	3000K	ABT	CL	TY2	TP	BL
SRB6F				347V	3500K			TY3	TS	BZ
SRB8D	8"		48W	480V	4000K	TY4	PC	WH		
SRB8F					5000K	TY5	MS/SD	SG		
custom size and wattage available									ILO	CONC
									GFR	CC
									EM	H-DIP

Notes:

- 3000K – 141 lm/w
- 3500K – 144 lm/w
- 4000K – 147 lm/w
- 5000K – 149 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchors, bolts, & template
- CL – Clean clear lens
- TY2 – Type II light distribution
- TY3 – Type III light distribution
- TY4 – Type IV light distribution
- TY5 – Type V light distribution (std)
- TP – Tamperproof hardware
- TS – Tamperproof bits
- PC – Button photocell (voltage specific)
- MS – Motion sensor with step dimming
- GFR – Ground fault receptacle
- EM – Emergency driver
- LO – Internal louvers with clear glass for HID only
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CONC – Concrete material for shaft only
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)