

Date: _____

Type: _____

Project: _____

SRB6F-SS BOLLARD

Elevate your outdoor space with our sleek, SRB6F-SS bollard! Crafted for durability and style, this bollard features a modern cylindrical design and a sturdy base. The elegant lighting adds a touch of sophistication, making it perfect for guiding pathways or enhancing landscapes. An essential addition to any contemporary outdoor setting!

Construction: One-piece flat cap with shaft. Upper assembly is secured with external screws to steel shaft. Area outside the lens can be perforated. Choose between surface mount or direct burial. Stainless-steel custom finish available.

Mounting: The fixture housing attaches securely to the anchoring plate using three flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: Comes with the standard opal lens, bringing a nice diffused glow, perfect for any setting!

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type V distribution (std), 180 degrees

Driver: 60Hz, 120-277V / 347V/ 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, button photocell (voltage specific), motion sensor, 0-10V dimming, step dimming, base cover, perforation around lens, ground fault receptacle, programmable color changing LEDs, emergency driver.



Finish: black, white, silver grey, bronze, custom color available upon request, stainless steel brushed #4, hydro-dipped

Listing: complies with CSA & UL standards; label for outdoor location



Warranty: 5-year limited warranty



SRB6F-SS:

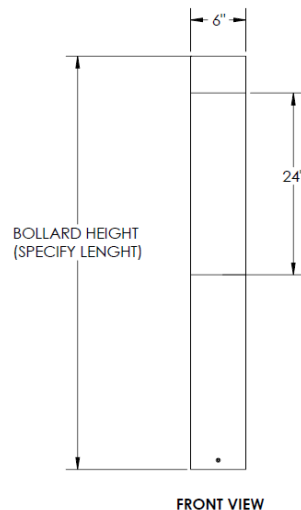

Anchoring Details:

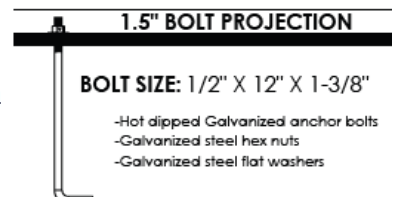



CUSTOM ARCHITECTURAL LIGHTING

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Toll free: 1 877 765 3722

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Size	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
SRB6F-SS	45”	48W	UNV	3000K	ABT	OAL	TY5	TP	BL
			347V	3500K	DB			TS	BZ
			480V	4000K			180 (for PERF option only)	PC	WH
				5000K				MS/SD	SG
								DM	BA4
							BC	CC	
							PERF	H-DIP	
							GFR		
							RGBW		
							EM		
custom wattage and size available									

Notes:

- 3000K – 152 lm/w*
- 3500K – 157 lm/w*
- 4000K – 160 lm/w*
- 5000K – 160 lm/w*
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchors, bolts, & template
- DB – Direct burial
- OAL – Opal lens (std)
- TY5 – Type V light distribution
- 180 – 180 degrees (available for PERF option only)
- TP – Tamperproof hardware
- TS – Tamperproof bits
- PC – Button photocell (voltage specific)
- MS – Motion sensor with step dimming
- DM – 0-10V 10% dimming
- BC – Base cover
- PERF – Perforation around lens
- GFR – Ground fault receptacle
- RGBW – Programmable, color changing LEDs
- EM – Emergency driver
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- BA4 – Brushed aluminum #4
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)

*Does not apply to RGBW

►►► Info on this spec sheet will change without notice as product development is an ongoing process.