

Date: _____

Type: _____

Project: _____

SRB8-F-X BOLLARD

Introducing the SRB8-F-X bollard – the perfect blend of strength and style! Its sleek, modern design with a distinctive recessed middle section adds a touch of elegance to any landscape. The SRB8-F-X is ideal for securing perimeters. Elevate your space's safety and aesthetics with the SRB8-F-X today!

Construction: Featuring a sleek flat cap and a robust extruded shaft with four sides, this bollard is built to last. Plus, you can customize the height to fit your specific needs. Elevate your outdoor space with a luminaire that combines strength, style, and flexibility.

Mounting: The fixture housing attaches securely to the anchoring plate using three flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: Standard clear lens provide you with a blast of light! Perfect for your application.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type V distribution

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with Ambient Operating Temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, button photocell


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty



SRB8-F-X:

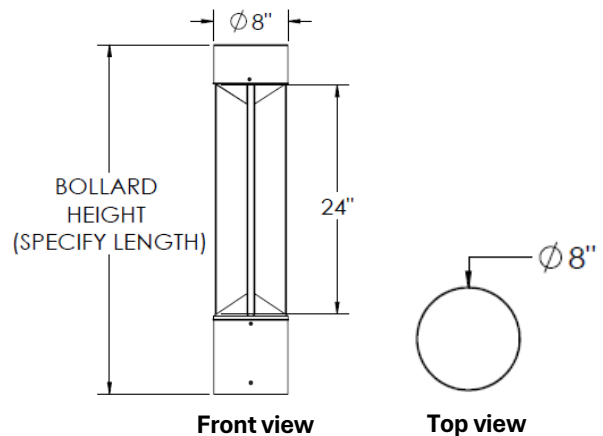

Anchoring Details:

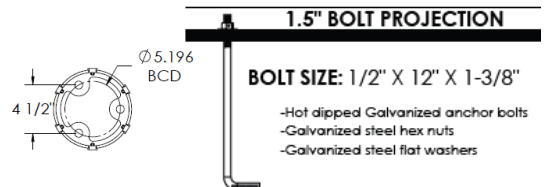



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Size	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
SRB8-F-X	18"	20W	UNV	3000K	ABT	CL	TY5	TP	BL
	36"		347V	3500K				TS	BZ
			480V	4000K				PC	WH
				5000K					SG
	custom wattage and size available								CC
									H-DIP

Notes:

- 3000K – 152 lm/w
- 3500K – 157 lm/w
- 4000K – 160 lm/w
- 5000K – 160 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchors, bolts, & template
- CL – Clear lens
- TY5 – Type V light distribution (std)
- TP – Tamperproof hardware
- TS – Tamperproof bits
- PC – Button photocell (voltage specific)
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)