



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

Date: _____

Type: _____

Project: _____

SRB8-X BOLLARD

Elevate your outdoor spaces with the SRB8-X bollard, featuring a sleek rounded top and stylish decorative bars. This bollard casts balanced, symmetrical light patterns, perfect for illuminating walkways and pathways. Its modern design ensures both safety and aesthetic appeal, making it an ideal choice for any landscape. Enhance your property's curb appeal with the versatile SRB8-X bollard.

Construction: Featuring a sleek dome top that seamlessly attaches to a durable extruded aluminum shaft. The lens is expertly silicone-sealed, providing reliable weather protection and ensuring long-lasting performance.

Mounting: The fixture housing attaches securely to the anchoring plate using three flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: Choose between the standard clear lens or the opal lens, for either a clear stroke of light, or an ambient glow.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type III distribution, Type V distribution, 180 degrees

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, button photocell, motion sensor, step dimming, emergency driver



Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped

Listing: complies with CSA & UL standards; label for outdoor location



Warranty: 5-year limited warranty



SRB8-X:

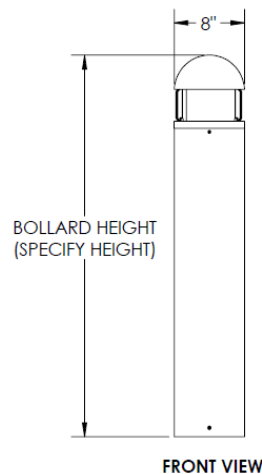

Anchoring Details:

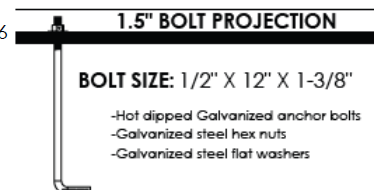



CUSTOM ARCHITECTURAL LIGHTING

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Toll free: 1 877 765 3722

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Size	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
SRB8X	42"	48W	UNV	3000K	ABT	CL	TY5	TP	BL
			347V	3500K		OPL	TY3	TS	BZ
			480V	4000K			180	PC	WH
				5000K				MS/SD	SG
								EM	CC
	custom wattage and size available								H-DIP

Notes:

- 3000K – 141 lm/w
- 3500K – 144 lm/w
- 4000K – 147 lm/w
- 5000K – 149 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchors, bolts, & template
- CL – Clear lens
- TY5 – Type V light distribution (std)
- 180 – 180 degrees
- TP – Tamperproof hardware
- TS – Tamperproof bits
- PC – Button photocell (voltage specific)
- MS – Motion sensor with step dimming
- EM – Emergency driver
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)