

Date: _____

Type: _____

Project: _____

SSQB BOLLARD

Introducing our premium Square Bollard Light! This sleek outdoor fixture features a modern design with four extruding bars at 90-degree angles. The clear lens ensures optimal illumination, while the silicone gasket guarantees uncompromised performance in extreme weather. With a standard height of 40 inches and three width options, you can customize your outdoor space effortlessly. Don't miss the Light Column Version – it's a game-changer!

Construction: Discover the elegance of our 40-inch standard bollard, meticulously crafted from durable aluminum 6061-T6. Its design combines resilience with captivating visual appeal.

Mounting: The fixture housing attaches securely to the anchoring plate using four flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: standard clear lens

Lamp: high power LEDs with 50,000 hrs. rated lamp life
L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type V (std)

Driver: 60Hz, 120-277V / 347V/480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C

Options: house cut-off, tamperproof hardware, tamperproof bits, button photocell (voltage specific)


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty



SSQB:





Front view



Top view

Anchoring Details:

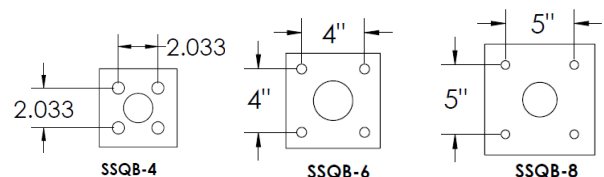



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Height	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
SSQB-4		14W	UNV	3000K	ABT	CL	TY5	HCO	BL
SSQB-6	40"	30W	347V	3500K				TP	BZ
SSQB-8		36W	480V	4000K				TS	WH
				5000K				PC	SG
									CC
	Custom wattage and height available								H-DIP

Notes:

- 3000K – 141 lm/w
- 3500K – 144 lm/w
- 4000K – 147 lm/w
- 5000K – 149 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchors, bolts, & template
- CL – Clear lens (std)
- TY5 – Type V light distribution (std)
- HCO – House side shield
- TP – Tamperproof hardware
- TS – Tamperproof bits
- PC – Button photocell (voltage specific)
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro dipped finish (contact factory for pattern design options)