



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

Date: _____

Type: _____

Project: _____

SUZ BOLLARD

Discover our stylish round bollard with a flat top and decorative bars! It provides ample, symmetrical light patterns, making it perfect for illuminating walkways and pathways. Enhance your outdoor space with this elegant and functional lighting solution.

Construction: Explore our meticulously designed 40-inch bollard, skillfully constructed from robust aluminum. This piece effortlessly combines durability with a striking visual appeal, making it the perfect addition to elevate any outdoor setting.

Mounting: The fixture housing attaches securely to the anchoring plate using three flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: The standard opal lens emit a soft glow that fits any aesthetic.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type V distribution (std)

Driver: 60Hz, 120-277V / 347V/ 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, 0-10V dimming, button photocell, ground fault receptacle, dome top, emergency driver


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty



SUZ-BLD:




Top View

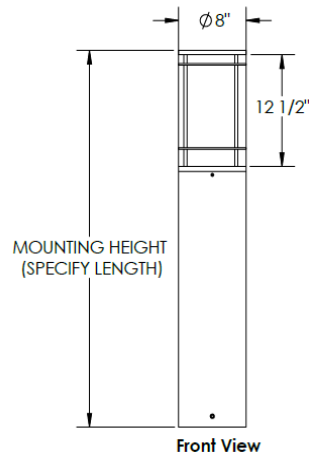

Front View

Anchoring Details:

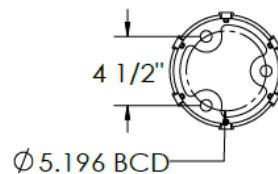

1.5" BOLT PROJECTION

BOLT SIZE: 1/2" X 12" X 1-3/8"

- Hot dipped Galvanized anchor bolts
- Galvanized steel hex nuts
- Galvanized steel flat washers



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Size	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
SUZ-BLD	40"	24W	UNV	3000K	ABT	OAL	TY5	TP/TS	BL
			347V	3500K				DM	BZ
			480V	4000K				PC	WH
				5000K				GFR	SG
	custom wattage and size available							D	CC
								EM	H-DIP

Notes:

- 3000K – 156 lm/w
- 3500K – 159 lm/w
- 4000K – 164 lm/w
- 5000K – 166 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchors, bolts, & template
- OAL – Opal lens (std)
- TY5 – Type V light distribution (std)
- TP – Tamperproof hardware
- TS – Tamperproof bits
- DM – 0-10V 10% dimming
- PC – Button photocell (voltage specific)
- GFR – Ground fault receptacle
- D – Dome top
- EM – Emergency driver
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro dipped finish (contact factory for pattern design options)