

Date: _____

Type: _____

Project: _____

TELS WALL MOUNT

Introducing TELS, our sleek surface luminaire made from aluminum extrusion. Designed to give interior spaces a unique look with its customizable laser cut design from the concave front and its subtle back glow. Call Solera if you plan to use this design for outdoor application.

Construction: Fixture is made from aluminum extrusion with weather-proof silicon gasket seal and stainless-steel external hardware for all-weather protection and corrosion resistance.

Mounting: Fixture is suitable to mount over a standard J-box. This fixture can mount vertically or horizontally.

Lens: Opal lens

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: front glow. Up and down lights are options with narrow, medium, or wide beam distribution

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: programmable color changing LEDs, tamperproof hardware, tamperproof bits, wet location, precise laser cut designs, stainless steel construction


Finish: black, white, silver grey, bronze, custom color available upon request

Listing: complies with CSA & UL standards; label for indoor location

Warranty: 5-year limited warranty




TELS:

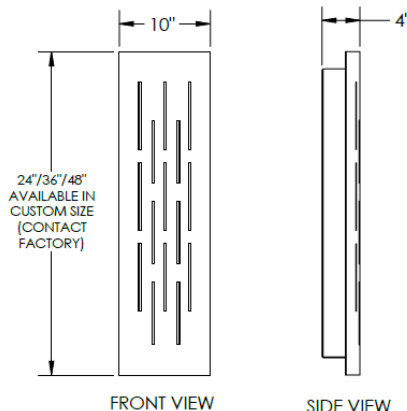


PRODUCT	DIM "A"	DIM "B"
24" TELS	18"	6.75"
36" TELS	30"	6.75"
48" TELS	40"	6.75"

MOUNTING DETAILS:



PATTERN A

PATTERN B



CUSTOM PATTERNS AVAILABLE
CONTACT FACTORY

--	--	--	--	--	--	--	--	--	--	--	--

Name	Size	LED Light Engine		Electrical	Color Temperature	Mounting	Lens	Light Pattern	Beam Distribution (for U/D only)	Options	Finish
		Front	U/D								
TELS	24"	20W	20W (max)	UNV	3000K	WM	OAL	F	NB	RGBW	BL
	36"	30W		347V	3500K			UF	MB	TP	BZ
	48"	42W		480V	4000K			DF	WB	TS	WH
					5000K			UDF		WL	SG
										PD	CC
custom wattage and size available											

Notes:

- 3000K – 156 lm/w*
- 3500K – 159 lm/w*
- 4000K – 164 lm/w*
- 5000K – 166 lm/w*
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- WM – Wall mount
- OAL – Opal lens
- F – Front glow (std)
- UF – Up light only with front glow
- DF – Down light only with front glow
- UDF – Up and down light with front glow
- NB – Narrow beam distribution, for U/D light only
- MB – Medium beam distribution, for U/D light only
- WB – Wide beam distribution, for U/D light only
- RGBW – Programmable color changing LEDs
- TP – Tamperproof hardware
- TS – Tamperproof bits
- WL – Wet location
- PD – Pattern design
- SS – Stainless steel construction
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (Confirm RAL No. prior to production)

*does not apply to RGBW