

Date: _____

Type: _____

Project: _____

VELA BOLLARD

Introducing our exquisite neo-classic lighting collection. Crafted with precision, each fixture boasts an elegant octagonal aluminum housing that radiates light from all angles. Whether you prefer wall-mounted, pendant, or ceiling-mounted options, our versatile design family has you covered. Illuminate your space with timeless sophistication and upgrade your environment with confidence.

Construction: Fixture head crafted from cast aluminum. Ensures both durability and style. The stainless-steel external hardware not only adds a touch of elegance but also provides exceptional corrosion resistance. Standard height is 42". Contact Solera for custom height.

Mounting: The fixture is mounted securely to the ground using four flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: clear lens (std); option for frosted lens

Lamp: high power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type V distribution

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature - 40°C to 55°C

Options: 0-10V dimming, tamperproof hardware, tamperproof bits, ground fault receptacle, button photocell (voltage specific), emergency driver, emergency driver with cold pack


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty



VELA-BLD:


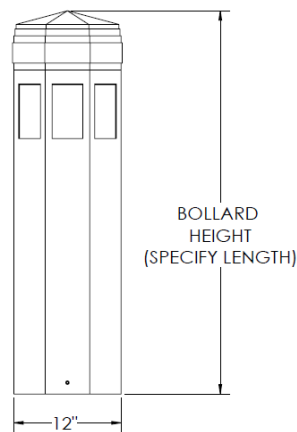


Front view



Top view

Anchoring details:

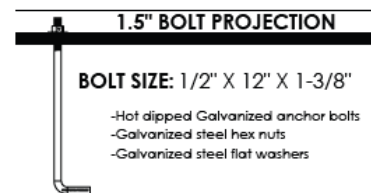

Note:

Available in wall mount version (check under outdoor luminaires: VELA-WM)
Available in pole mount version (check under outdoor luminaires: VELA-PM)
Available in pendant version (check under outdoor luminaires: VELA)



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Size	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options		Finish
VELA-BLD	42"	48W	UNV	3000K	ABT	CL	TY5	DM	EM	BL
			347V	3500K		FL		TP	EM-CLD	BZ
			480V	4000K				TS	HCO	WH
				5000K				GFR		SG
	custom size and wattage available							PC		CC
										H-Dip

Notes:

- 3000K – 141 lm/w
- 3500K – 144 lm/w
- 4000K – 147 lm/w
- 5000K – 149 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchors, bolts, & template
- CL – Clear lens (std)
- FL – Frosted lens
- TY5 – Type V light distribution
- DM – 0-10v 10% dimming
- TP – Tamperproof hardware
- TS – Tamperproof bits
- GFR – Ground fault receptacle
- PC – Button photocell (voltage specific)
- EM – Emergency driver
- EM-CLD – Emergency driver cold pack
- HCO – House side shield
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-Dip – Hydro-dipped finish (contact factory for pattern design options)