



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

Date: _____

Type: _____

Project: _____

VENUS BOLLARD

Introducing our stunning upper assembly display, designed with an elegant hour-glass silhouette and sleek curvilinear bars. The silicone-sealed lens ensures exceptional weather protection, while the frosted acrylic lens adds a touch of sophistication as our standard feature. Elevate your space with this perfect blend of style and durability!

Construction: Crafted with premium stainless steel, our external hardware is built to last. Perfect for outdoor walkways, it offers unmatched durability and a sleek, modern look. Upgrade your outdoor spaces with confidence and style!

Mounting: The fixture housing attaches securely to the anchoring plate using three flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: Choose between our elegant frosted lens, which comes standard, or upgrade to the opal lens for a unique, diffused glow. Both options are designed to enhance your space with style and sophistication.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type V (std)

Driver: 60Hz, 120-277V / 347V/ 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C

Options: tamperproof hardware, tamperproof bits, ground fault receptacle, button photocell (voltage specific), step dimming, motion sensor, emergency driver, emergency driver with cold pack


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty



VENUS:




TOP

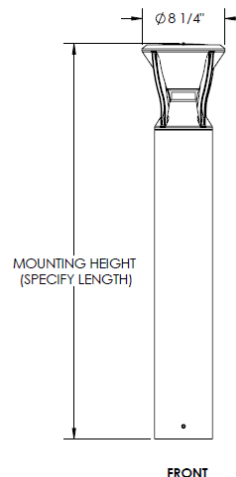

FRONT

Anchoring Details:

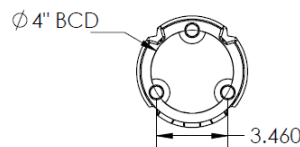

1.5" BOLT PROJECTION

BOLT SIZE: 1/2" X 12" X 1-3/8"

- Hot dipped Galvanized anchor bolts
- Galvanized steel hex nuts
- Galvanized steel flat washers



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Size (max)	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
VENUS	39” (max)	36W	UNV	3000K	ABT	FL	TY5	TP	BL
			347V	3500K				TS	BZ
			480V	4000K				GFR	WH
			5000K	MS/SD				SG	
				PC				CC	
				EM				H-DIP	
			custom wattage and size available					EM-CLD	

Notes:

- 3000K – 141 lm/w
- 3500K – 144 lm/w
- 4000K – 147 lm/w
- 5000K – 149 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchors, bolts, & template
- FL – Frosted lens (std)
- TY5 – Type V light distribution (std)
- DM – 0-10v dimming
- TP – Tamperproof hardware
- TS – Tamperproof bits
- GFR – Ground fault receptacle
- MS – Motion sensor with step dimming
- PC – Button photocell (voltage specific)
- EM – Emergency driver
- EM-CLD – Emergency driver cold pack
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro dipped finish (contact factory for pattern design options)