



CUSTOM ARCHITECTURAL LIGHTING

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Toll free: 1 877 765 3722

Fax: 905 457 1115

soleracorp.com

Date: _____

Type: _____

Project: _____

WND LIGHT COLUMN

Our premium circular light column. The WND-1 Lighting Column! Features a high impact opal diffuser lens on top of extruded aluminum shaft. This fixture combines stability with beauty and elegance. Designed to add simple contemporary aesthetic to any outdoor pathways and landscapes. Choose between the 6" or the 8" sizes. You can customize shaft and lens height. Contact the factory for other options and modifications.

Construction: Fixture housing is constructed from 6061-T6 aluminum alloy. It has weather-proof silicon gasket seal for all weather protection and stainless-steel external hardware for corrosion resistance. Trust WND-1 for exceptional resistance to the elements.

Mounting: The fixture housing attaches securely to the anchoring plate using four flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: See your surroundings with our standard high impact UV stabilized opal lens!

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type V (std)

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C

Options: tamperproof hardware, tamperproof bits, emergency driver, voltage specific button photocell, 180-degree perforated mesh covering the lens, ground fault receptacle


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty




WND:

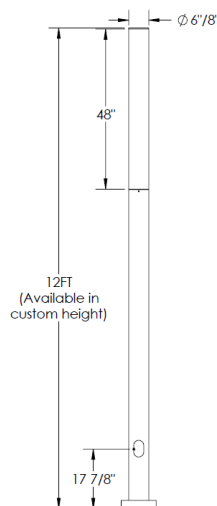

Anchoring Details:



WND-6



WND-8

Anchorbolt Size: 3/4" X 18" X 3-3/4"

- Hot dipped Galvanized anchor bolts
- Galvanized steel hex nuts
- Galvanized steel flat washers



CUSTOM ARCHITECTURAL LIGHTING

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Toll free: 1 877 765 3722

Fax: 905 457 1115

soleracorp.com

Name	Height	Light Engine	Electrical	Color Temperature	Mounting	Lens	Light Pattern	Options	Finish
WND-6	12FT	42W	UNV	3000K	ABT	CL	TY5	TP	BL
WND-8		60W	347V	3500K				TS	BZ
			480V	4000K				EM	WH
				5000K				PC	SG
								PFM	CC
								GFR	H-DIP
	custom wattage and size available							RGBW	

Notes:

- 3000K – 156 Source lm/w*
- 3500K – 159 Source lm/w*
- 4000K – 164 Source lm/w*
- 5000K – 166 Source lm/w*
- UNV – Universal voltage (120-277V)
- 347V – 347 Volt
- 480v- 480 Volt
- ABT – Anchors, bolts, template
- CL – High impact UV stabilized clear acrylic lens
- TY5 – Type V light distribution (std)
- TP – Tamperproof hardware
- TS – Tamperproof bits
- EM – Emergency driver
- PC – Button photocell, voltage specific
- PFM – Perforated mesh (180 degrees)
- GFR – Ground fault receptacle
- RGBW – Programmable color changing LEDs
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (Confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)

*Does not apply to RGBW