



CUSTOM ARCHITECTURAL LIGHTING

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Toll free: 1 877 765 3722

Fax: 905 457 1115

soleracorp.com

Date: _____

Type: _____

Project: _____

YUMI LIGHT COLUMN

Introducing our decorative cylindrical light column! YUMI is an eye-catching, attention-grabbing fixture. Features a high impact opal diffuser lens inside the solid, sturdy extruded aluminum shaft. We highlight the customizable precise, laser-cut design and mounting position. Your own look can be highlighted. Your desired mounting angle and rotation can be applied. Contact factory for the many options and modifications.

Construction: Fixture housing is constructed from 6061-T6 aluminum alloy. It has weather-proof silicon gasket seal for all weather protection and stainless-steel external hardware for corrosion resistance. Trust YUMI for exceptional resistance to the elements while exuding its distinct presence.

Mounting: The fixture housing attaches securely to the anchoring plate using four flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: See your surroundings with our standard high impact UV stabilized opal lens!

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80


Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C

Options: tamperproof hardware, tamperproof bits, 0-10v 10% dimming, ground fault receptacle



Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped

Listing: complies with CSA & UL standards; label for outdoor location

Warranty: 5-year limited warranty

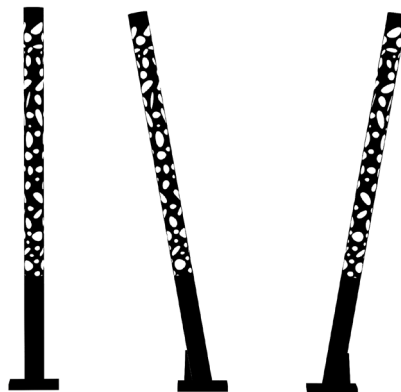

YUMI:

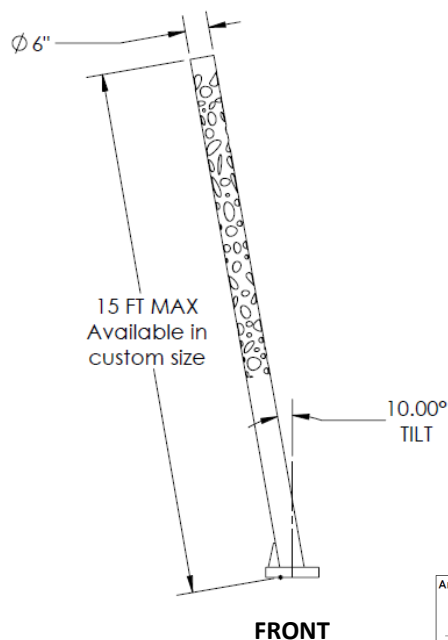



CUSTOM ARCHITECTURAL LIGHTING

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Toll free: 1 877 765 3722

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--	--	--

Name	Height (specify)	Tilt	Rotation	Light Engine (max)	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
YUMI	15FT (max)	10°	0°	90W	UNV	3000K	ABT	OPL	TY5	TP	BL
		ST	45°		347V	3500K				TS	BZ
			90°		480V	4000K				DM	WH
			135°			5000K				GFR	SG
			180°			RGBW					CC
			225°								H-DIP
			270°								
			305°								

Notes:

- 3000K – 156 lm/w*
- 3500K – 159 lm/w*
- 4000K – 164 lm/w*
- 5000K – 166 lm/w*
- RGBW – Programmable color changing LEDs
- ST – Straight column
- UNV – Universal voltage (120-277V)
- 347V – 347 Volt
- 480V- 480 Volt
- ABT – Anchors, bolts, template
- OPL – Opal lens
- TP – Tamperproof hardware
- TS – Tamperproof bits
- DM – 0-10V 10% dimming
- GFR – Ground fault receptacle
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- CC – Custom color (Confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)

*Does not apply to RGBW