

Date: _____

Type: _____

Project: _____

ZELL LIGHT COLUMN

Presenting ZELL Light Column! Sleek and slim with flat top and funky laser cut design. It's narrow 4-inch profile and attractive luminaire provides a modern and vibrant appeal to your outdoor plan. Choose from the 3 different heights or customize to your preference. ZELL is the perfect illumination to a playful landscape. Contact Solera for the wall mount version.

Construction: Crafted from aluminum extrusion, our 4-inch slim light column stands at a standard height of 72, 90, and 96 inches. Whether lining pathways or accentuating garden features, this is your canvas. Contact us today to elevate your landscape with personalized elegance.

Mounting: The fixture attaches securely to the ground and anchoring plate using three flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: The standard opal lens gently diffuses light, creating a soft and inviting ambiance.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type V

Driver: 60Hz, 120-277V / 347V / 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.


Options: tamperproof hardware, tamperproof bits, 0-10v 10% dimming, custom size and laser cut design (contact Factory)

Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped


Listing: complies with CSA & UL standards; label for outdoor location

Warranty: 5-year limited warranty

ZELL:

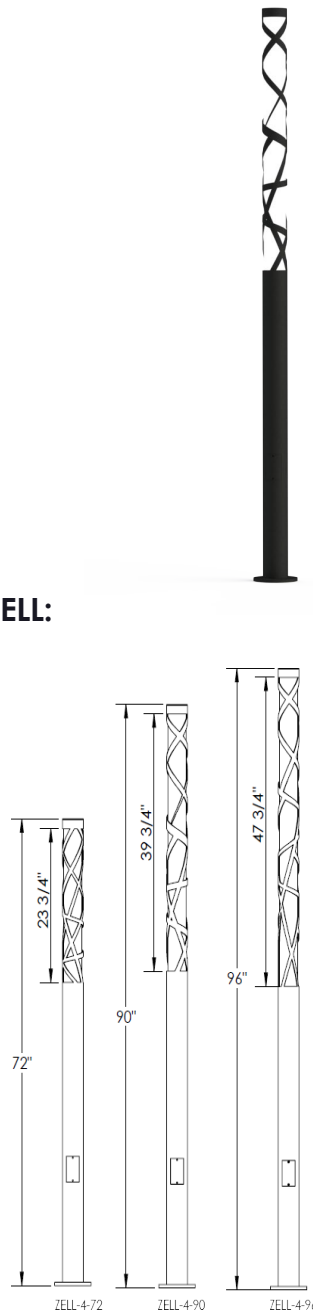

Anchoring Details:



Anchorbolt Size: 1/2" X 12" X 1-3/8"

-Hot dipped Galvanized anchor bolts
-Galvanized steel hex nuts
-Galvanized steel flat washers

CONTACT FACTORY FOR WALL MOUNT VERSION



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Height (inches)	Light Engine (max)	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
ZELL-4	72	24W	UNV	3000K	ABT	OPL	TY5	TP	BL
	90	40W	347V	3500K				TS	BZ
	96	48W	480V	4000K				DM	WH
				5000K					SG
									CC
									H-DIP
	custom wattage and size available								

Notes:

- 3000K – 156 lm/w
- 3500K – 159 lm/w
- 4000K – 164 lm/w
- 5000K – 166 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347V
- 480V – 480V
- ABT – Anchors, bolts, & template
- OPL – Opal lens
- TY5 – Type V light distribution
- TP – Tamperproof hardware
- TS – Tamperproof bits
- DM – 0-10V 10% dimming
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)