



CUSTOM ARCHITECTURAL LIGHTING

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Toll free: 1 877 765 3722

Fax: 905 457 1115

soleracorp.com

Date: _____

Type: _____

Project: _____

ZOLO BOLLARD

Our ZOLO bollard has a modern & simplistic design with angled upper assembly. With its smooth body and clean, sharp corners, this bollard makes for the perfect choice in uplifting any outdoor space providing you with unique, futuristic, and youthful look.

Construction: The fixture housing is constructed from 6061 aluminum alloy. The weatherproof silicon gasket seal ensures superior all-weather protection. Its stainless-steel external hardware provides corrosion resistance. Discover the difference this sleek modern bollard gives!

Mounting: The fixture housing attaches securely to the anchoring plate using four flush-mounted bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Forward throw

Driver: 60Hz, 120-277V / 347V/ 480V electronic LED driver, thermally protected with low THD. 2kV native surge protection and 2.5kV ringwave with 90°C maximum case hot spot temperature. Operating temperature ranging between -10°C to 50°C.

Options: tamperproof hardware, tamperproof bits, 0-10V dimming, ground fault receptacle, custom height (contact Factory)


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty



ZOLO:

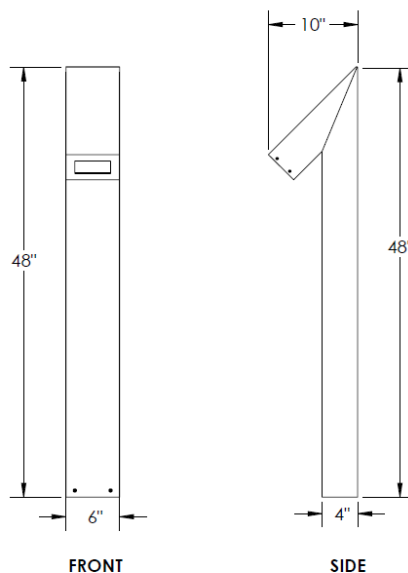

Anchoring details:

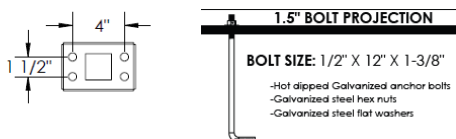

--	--	--	--	--	--	--	--	--	--

Name	Size	Light Engine	Electrical	Color Temp	Mounting	Lens	Light Pattern	Options	Finish
ZOLO	48"	16W (MAX)	UNV	3000K	ABT	CPL	FT	TP	BL
			347V	3500K				TS	BZ
			480V	4000K				DM	WH
				5000K				GFR	SG
									CC
	custom wattage and size available								H-DIP

Notes:

- 3000K – 141 Source lm/w
- 3500K – 144 Source lm/w
- 4000K – 147 Source lm/w
- 5000K – 149 Source lm/w
- UNV – Universal voltage (120V - 277V)
- 347V – 347 volts
- 480V – 480 volts
- ABT – Anchors, bolts, template
- CPL – Clear lens
- FT – Forward throw
- TP – Tamperproof hardware
- TS – Tamperproof bits
- DM – 0-10V 10% dimming
- GFR – Ground fault receptacle
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)